



94 JACKSON RD, SUITE 110, DEVENS, MA 01434

Isolators / Circulators

Model RMIS.17000-18500Sf

Isolator, SMA female



Frequency	Insertion Loss	Isolation	VSWR
17-18.5GHz	0.35dB max	27dB min	1.17:1 max

Notes:

- Input and output impedance: 50Ω
- Connector: SMA female 2 places
- Input Power $<1W$
- Case material: Aluminum alloy
- Operation temperature: -40°C to $+80^{\circ}\text{C}$

*Complies with the requirement set out the Council Directive 2002/95/EC. The following standards were applies:
EPA3050B&AAS, EPA3060A&EPA7196, EPA3052&AAS, EN1122: 2001&AAS, EPA3540C&GC-MS*

2-56UNC X 3.5 mm.(Min)
(2 PLACES, BOTH SIDES)

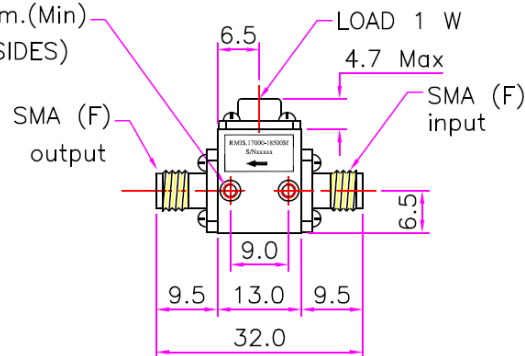

Dimensions in mm. All specifications are subject to change without notice.

Telephone: 978-772-3767

Fax: 978-772-3768

www.responsemicrowave.com