



94 JACKSON RD, SUITE 110, DEVENS, MA 01434

Isolators / Circulators

Model RMIS.2000-6000Sf


Isolator, SMA female

Frequency	Insertion Loss	Isolation	VSWR
2 - 6GHz	1.2dB max	14dB min	1.50:1 max

Notes:

- Input and output impedance: 50 Ω
- Connector: SMA female
- Input Power: 1W, peak Power: 25W
- Case material: Aluminum alloy/black paint
- Operation temperature: -30°C to +80°C

Complies with the requirement set out the Council Directive 2002/95/EC. The following standards were applies: EPA3050B&AAS, EPA3060A&EPA7196, EPA3052&AAS, EN1122: 2001&AAS, EPA3540C&GC-MS

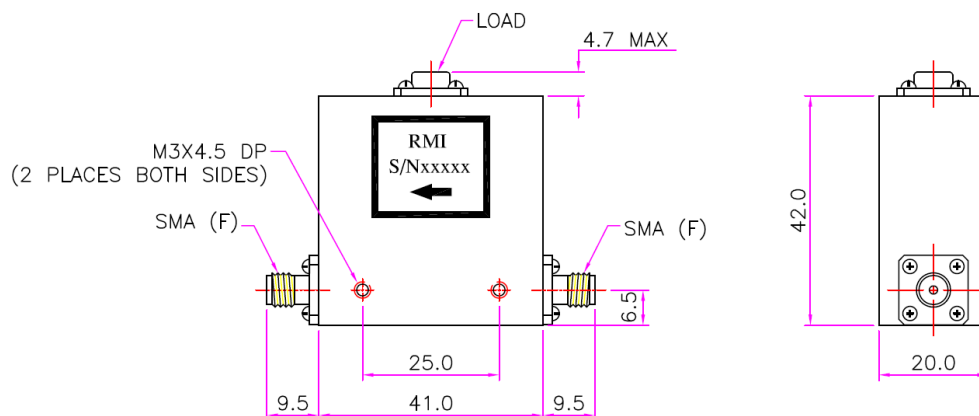

Dimensions in mm. All specifications are subject to change without notice.

Telephone: 978-772-3767

Fax: 978-772-3768

www.responsemicrowave.com