



94 JACKSON RD, SUITE 110, DEVENS, MA 01434

Isolators / Circulators

Model RMIS.2170-2320T


Isolator, drop-in

Frequency	Insertion Loss	Isolation	VSWR
2.17 – 2.32 GHz	0.3dB max	23dB min	1.20:1 max

Notes:

- Input and output impedance: 50 Ohms
- Connector: tab
- Input Power: 110W, Reverse Power: <100W 20dB
- Case material: Aluminum alloy
- Operation temperature: -30°C to +80°C

Complies with the requirement set out the Council Directive 2002/95/EC. The following standards were applies: EPA3050B & AAS, EPA3060A & EPA7196, EPA3052 & AAS, EN1122: 2001 & AAS, EPA3540C & GC-MS

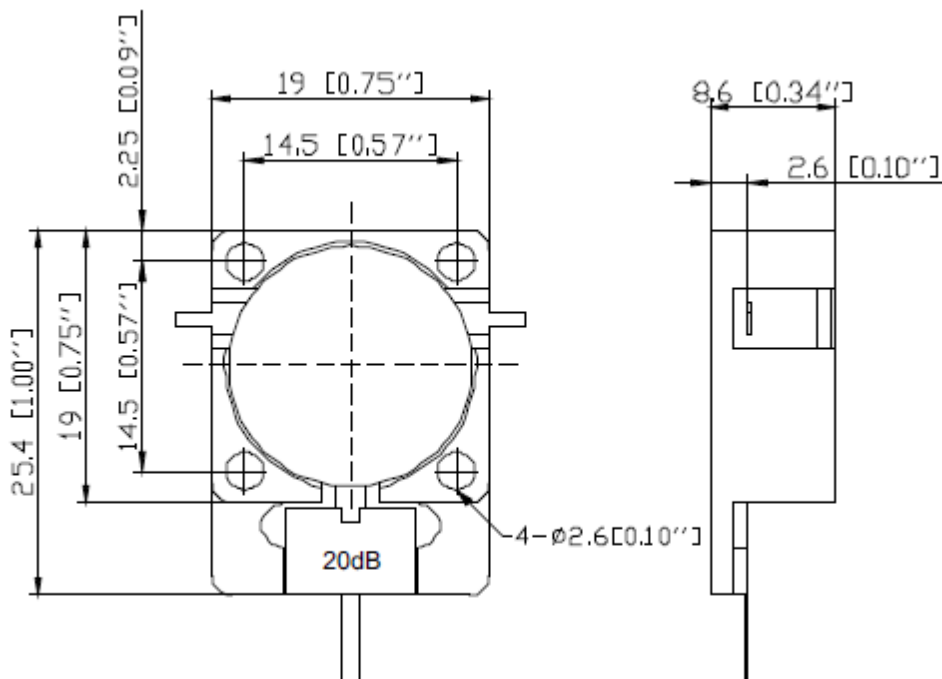

Dimensions in mm. All specifications are subject to change without notice.

Telephone: 978-772-3767

Fax: 978-772-3768

www.responsemicrowave.com