94 JACKSON RD, SUITE 110, DEVENS, MA 01434

Isolators / Circulators

Model RMIS.2500-3500Sfm Isolator, SMA male/female

Frequency	Insertion Loss	Isolation	VSWR
2500-3500MHz	0.28dB max	21dB min	1.20:1 max

Notes:

a. **Input and output impedance: 50Ω**
b. **Connector: SMA male to female**
c. **Power: Forward 50W avg, 100W peak**
   Reverse: 5W avg
d. **Case material: Aluminum alloy**
e. **Operation temperature: -40° to +85°C**
f. **RoHS Compliant**

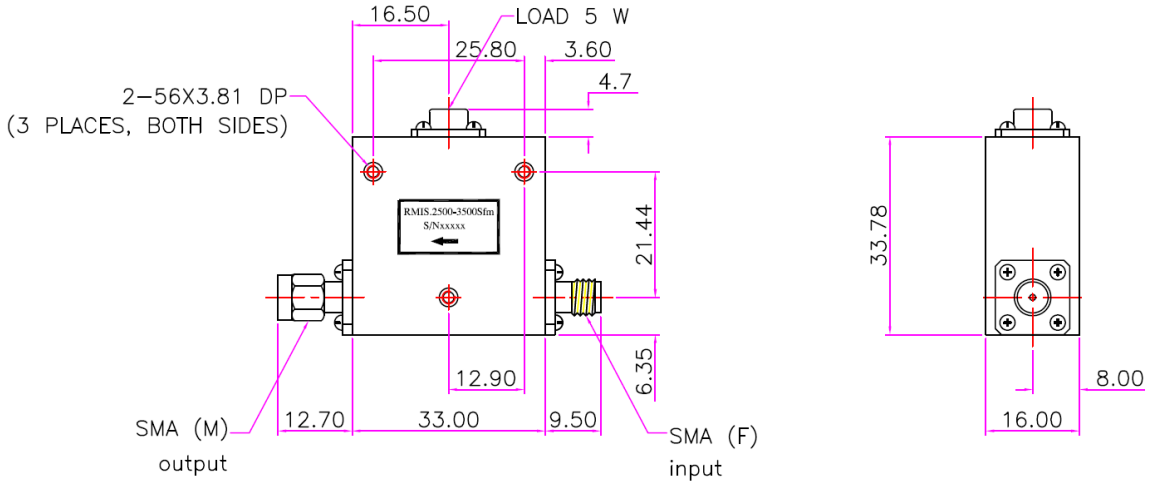

Dimensions in mm. All specifications are subject to change without notice.

Telephone: 978-772-3767 **Fax: 978-772-3768**

www.responsemicrowave.com