94 JACKSON RD, SUITE 110, DEVENS, MA 01434

Isolators / Circulators

Model RMIS.31000-37000.292mf Isolator, 2.92mm male/female

Frequency	Insertion Loss	Isolation	VSWR
31 - 37GHz	1.1dB max	17dB min	1.35:1 max

Notes:

a. **Input and output impedance: 50Ω**
b. **Connector: SMA female**
c. **Input Power: 1W, Reverse Power: 1W, Peak Power: 100W**
d. **Case material: Aluminum alloy w/black paint**
e. **Operation temperature: -30°C to +80°C**

Complies with the requirement set out the Council Directive 2002/95/EC. The following standards were applies:
EPA3050B&AAS, EPA3060A&EPA7196, EPA3052&AAS, EN1122: 2001&AAS, EPA3540C&GC-MS

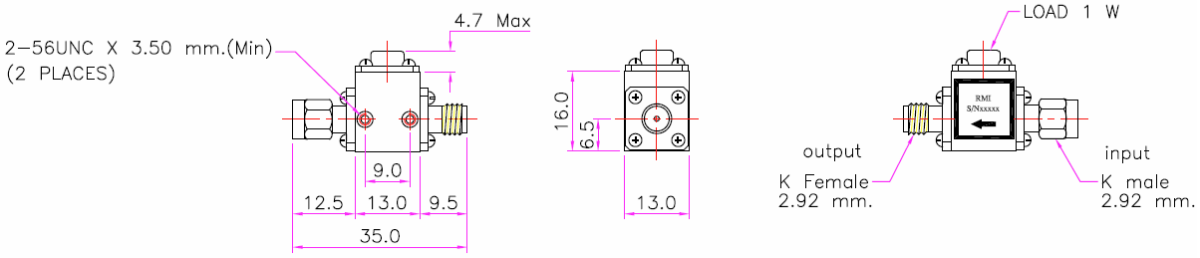

Dimensions in mm. All specifications are subject to change without notice.

Telephone: 978-772-3767 **Fax: 978-772-3768**

www.responsemicrowave.com

Rev 2/7/16