



94 JACKSON RD, SUITE 110, DEVENS, MA 01434

Isolators / Circulators

Model RMIS.5000-6000Sf


Isolator SMA female

Frequency	Insertion Loss	Isolation	VSWR
5000-6000MHz	0.35dB max	20dB min	1.20:1 max

Notes:

- Input and output impedance: 50 Ω
- Connector: SMA female 2 places
- Forward Power: 30W max, Reverse Power: 10W max
- Case material: Aluminum alloy
- Operation temperature: -30°C to +70°C
- RoHS Compliant

Complies with the requirement set out the Council Directive 2002/95/EC. The following standards were applies: EPA3050B&AAS, EPA3060A&EPA7196, EPA3052&AAS, EN1122: 2001&AAS, EPA3540C&GC-MS

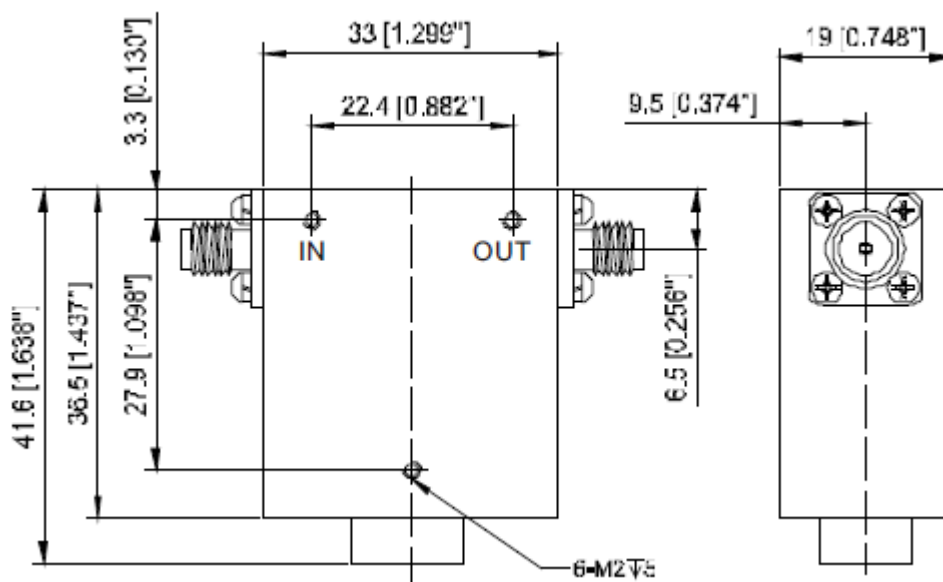

Dimensions in mm. All specifications are subject to change without notice.

Telephone: 978-772-3767

Fax: 978-772-3768

www.responsemicrowave.com