94 JACKSON RD, SUITE 110, DEVENS, MA 01434

Isolators / Circulators

Model RMIS.6000-18000Sfa Isolator, SMA female

Frequency	Insertion Loss	Isolation	VSWR
6 - 18 GHz	1.3dB max	14dB min	1.5:1 max

Notes:

a. **Input and output impedance: 50Ω**
b. **Connector: SMA female**
c. **Input Power: 10W, Reverse Power: 10W, Peak Power: 100W**
d. **Case material: Aluminum alloy w/black paint**
e. **Operation temperature: -30°C to +80°C**

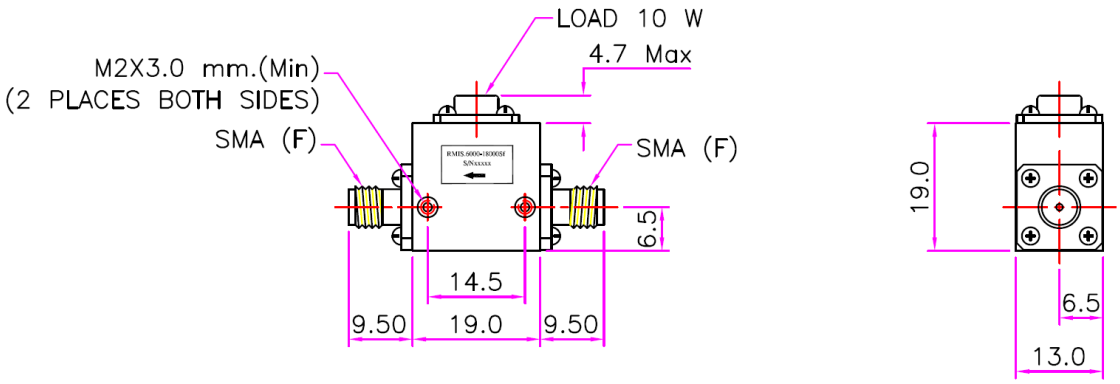

Dimensions in mm. All specifications are subject to change without notice.

Telephone: 978-772-3767 **Fax: 978-772-3768**

www.responsemicrowave.com

Rev 10/27/23