94 JACKSON RD, SUITE 110, DEVENS, MA 01434

Isolators / Circulators

Model RMIS.700-1000Sf — Isolator, SMA female

Frequency	Insertion Loss	Isolation	VSWR
700-1000MHz	0.6dB max	18dB min	1.30:1 max

Notes:

a. Input and output impedance: 50Ω
b. Connector: SMA female
c. Input Power: 100W, Reverse: 20W
d. Case material: Aluminum alloy clear iridite
e. Operation temperature: -30°C to +75°C
f. Direction: clockwise

Complies with the requirement set out the Council Directive 2002/95/EC. The following standards were applies:
EPA3050B&AAS, EPA3060A&EPA7196, EPA3052&AAS, EN1122: 2001&AAS, EPA3540C&GC-MS

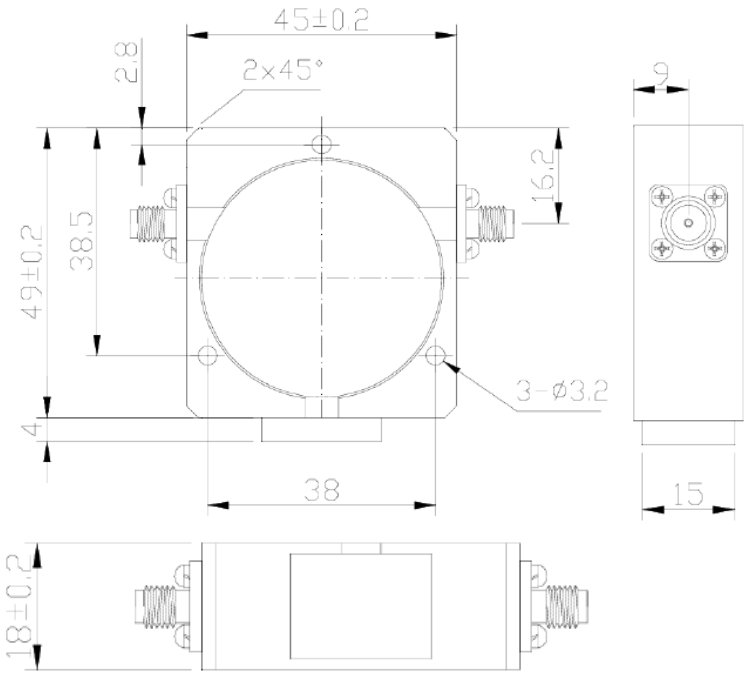

Dimensions in mm. All specifications are subject to change without notice.

Telephone: 978-772-3767 **Fax: 978-772-3768**

www.responsemicrowave.com

Rev 1/5/26