94 JACKSON RD, SUITE 110, DEVENS, MA 01434

Isolators / Circulators

Model RMIS.7700-8500Sf Isolator, SMA female

Frequency	Insertion Loss	Isolation	VSWR
7.7-8.5 GHz	0.4dB max	20dB min	1.25:1 max

Notes:

a. **Input and output impedance: 50 Ohms**
b. **Power, 50W forward, 10W reverse**
c. **Connector: SMA female 2 places**
d. **Case material: Aluminum alloy**
e. **Operation temperature: -30C to +60C deg**

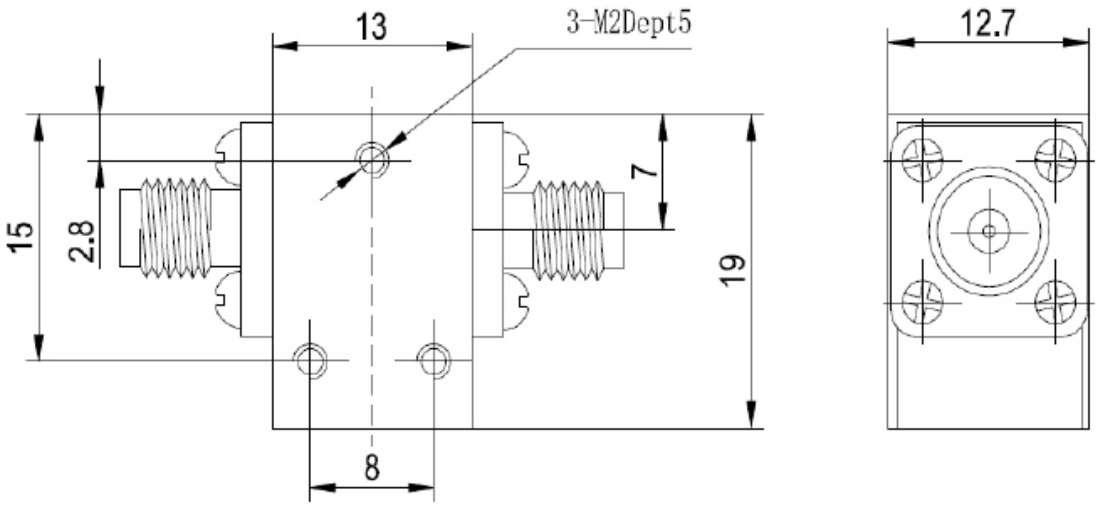

Dimensions in mm. All specifications are subject to change without notice.

Telephone: 978-772-3767 **Fax: 978-772-3768**

www.responsemicrowave.com

Rev 7/25/09