94 JACKSON RD, SUITE 110, DEVENS, MA 01434

Isolators / Circulators

Model RMIS.800-1000Nfa Isolator, N female

Frequency	Insertion Loss	Isolation	VSWR
800-1000MHz	0.45dB max	21dB min	1.19:1 max

Notes:

a. **Input and output impedance: 50Ω**
b. **Connector: N female**
c. **Power: Forward - 100W, Reverse - 100W**
d. **Case material: Aluminum alloy/nickel**
e. **Operation temperature: -30°C to +80°C**
f. **Power rating assumes proper mounting to a heat sink.**

Complies with the requirement set out the Council Directive 2002/95/EC. The following standards were applies: ***EPA3050B&AAS, EPA3060A&EPA7196, EPA3052&AAS, EN1122: 2001&AAS, EPA3540C&GC-MS***

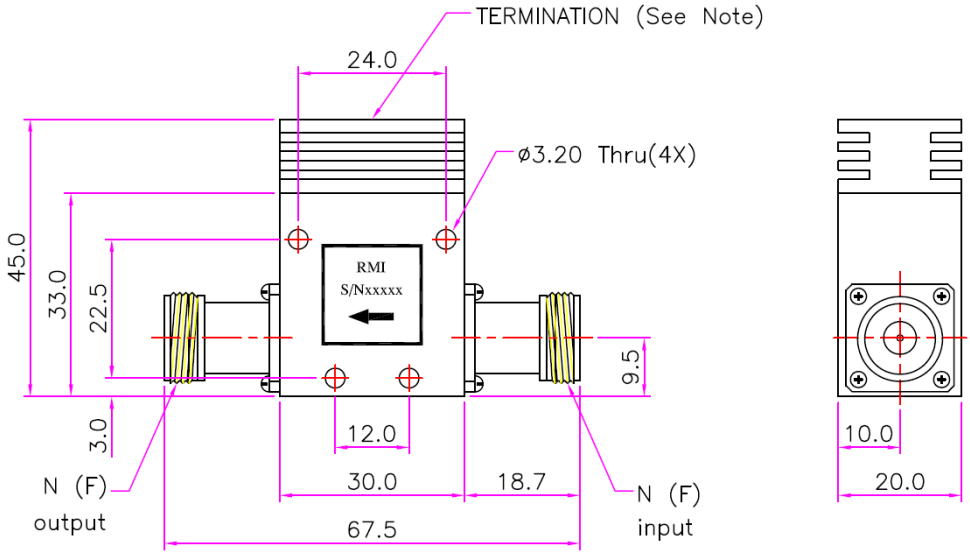

Dimensions in mm. All specifications are subject to change without notice.

Telephone: 978-772-3767 **Fax: 978-772-3768**

www.responsemicrowave.com

Rev 12/5/18