94 JACKSON RD, SUITE 110, DEVENS, MA 01434

Isolators / Circulators

Model RMIS.800-2400Sf Isolator, SMA female

Frequency	Insertion Loss	Isolation	VSWR
0.8 – 2.4GHz	1.4dB max	13dB min	1.65:1 max

Notes:

a. Input and output impedance: 50Ω
b. Connector: SMA female
c. Power: forward 50W max, reverse 50W max
d. Case material: Aluminum alloy/clear iridite
e. Operation temperature: -25°C to +70°C

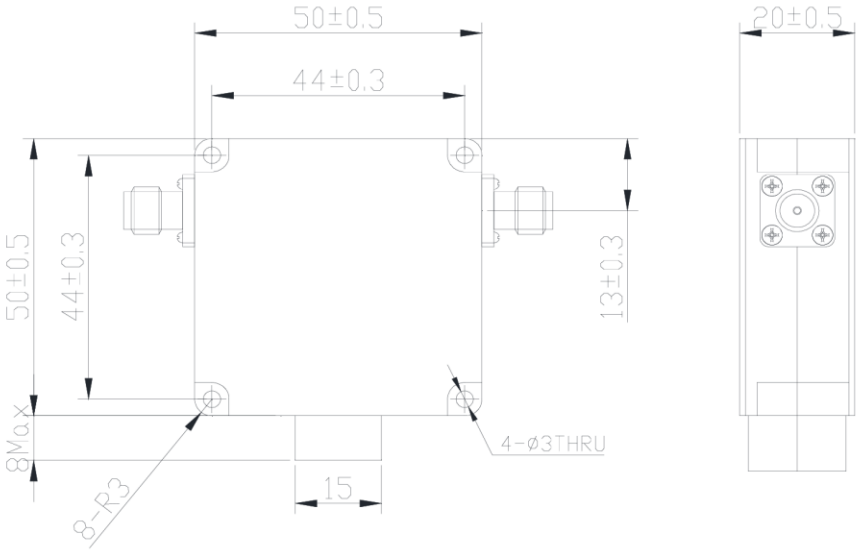

Dimensions in mm. All specifications are subject to change without notice.

Telephone: 978-772-3767 **Fax: 978-772-3768**

www.responsemicrowave.com

Rev 10/7/19