94 JACKSON RD, SUITE 110, DEVENS, MA 01434

Isolators / Circulators

Model RMIS.8000-12000CWT — Isolator, Drop-in

Frequency	Insertion Loss	Isolation	VSWR	Phase Deviation
8-12GHz	0.5dB max	20dB min	1.20:1 max	5°max

Notes:

a. Input and output impedance: 50Ω
b. Connector: flat tab 2 places
c. Power: forward 10W, Reverse 2W
d. Case material: steel/nickel
e. Tab: BeCu/silver
f. Operation temperature: -35°C to +85°C
g. RoHS Compliant

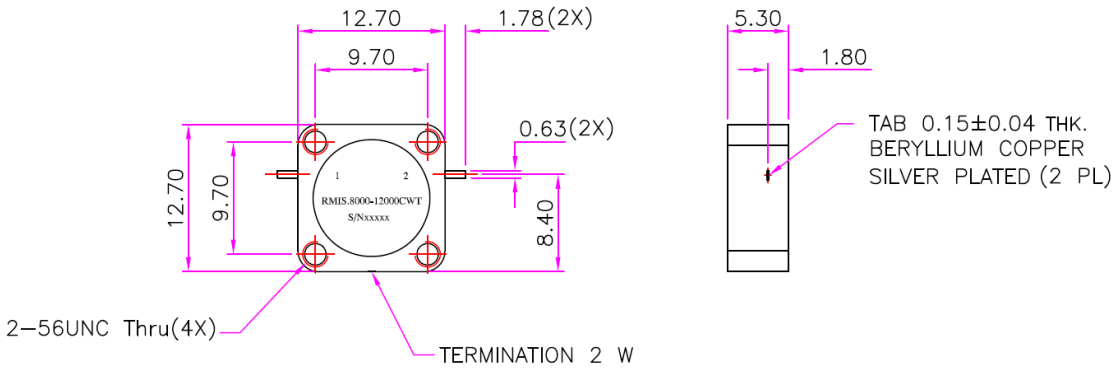

Dimensions in mm. All specifications are subject to change without notice.

Telephone: 978-772-3767 **Fax: 978-772-3768**

www.responsemicrowave.com

Rev 11/17/22