



94 JACKSON RD, SUITE 110, DEVENS, MA 01434

Isolators / Circulators


Model RMIS.8000-1200Sf

Isolator, SMA female

Frequency	Insertion Loss	Isolation	VSWR
8-12 GHz	0.5dB max	20dB min	1.25:1 max

Notes:

- Input and output impedance: 50 Ohms
- Connector: SMA female 2 places
- Case material: Aluminum alloy
- Operation temperature: -30C to +60C deg

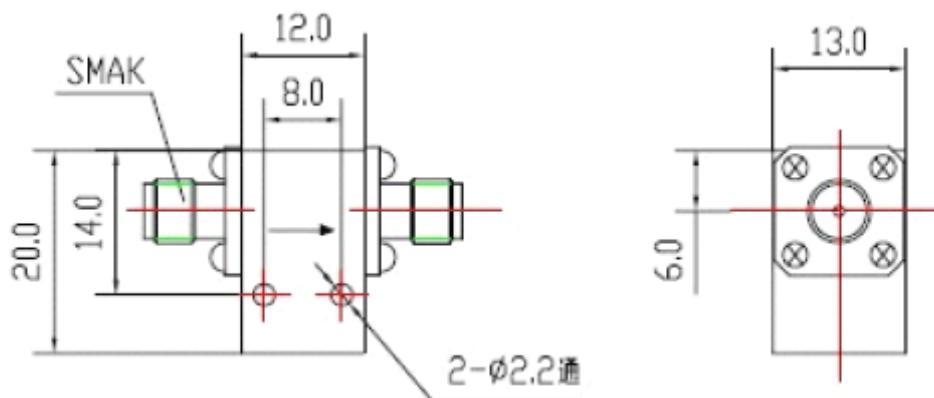

All specifications are subject to change without notice.

Telephone: 978-772-3767

Fax: 978-772-3768

www.responsemicrowave.com