94 JACKSON RD, SUITE 110, DEVENS, MA 01434

Isolators / Circulators

Model RMIS.9000-9500Sm Isolator, SMA male

Frequency	Insertion Loss	Isolation	VSWR
9 – 9.5 GHz	0.4dB max	20dB min	1.25:1 max

Notes:

a. Input and output impedance: 50Ω
b. Connector: SMA male 2 places
c. Input Power: 10W, Reverse Power: 1W
d. Case material: Aluminum alloy w/iridite finish
e. Operation temperature: -40°C to +85°C

Complies with the requirement set out the Council Directive 2002/95/EC. The following standards were applies:
EPA3050B&AAS, EPA3060A&EPA7196, EPA3052&AAS, EN1122: 2001&AAS, EPA3540C&GC-MS

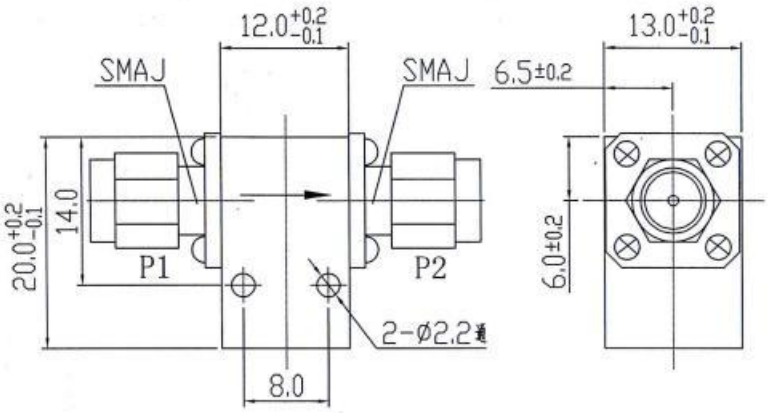

Dimensions in mm. All specifications are subject to change without notice.

Telephone: 978-772-3767 **Fax: 978-772-3768**

www.responsemicrowave.com

Rev 12/19/25