



94 JACKSON RD, SUITE 110, DEVENS, MA 01434

Isolators / Circulators

Model RMIS.950-2000Sf


Isolator, SMA female

Frequency	Insertion Loss	Isolation	VSWR
950-2000MHz	0.8dB max	15dB min	1.40:1 max

Notes:

- Input and output impedance: 50Ω
- Connector: SMA female (type N available on request)
- Input Power: 100W, Reverse Power: 50W,
- Case material: Aluminum alloy
- Operation temperature: -30°C to $+80^{\circ}\text{C}$

Complies with the requirement set out the Council Directive 2002/95/EC. The following standards were applies: EPA3050B&AAS, EPA3060A&EPA7196, EPA3052&AAS, EN1122: 2001&AAS, EPA3540C&GC-MS

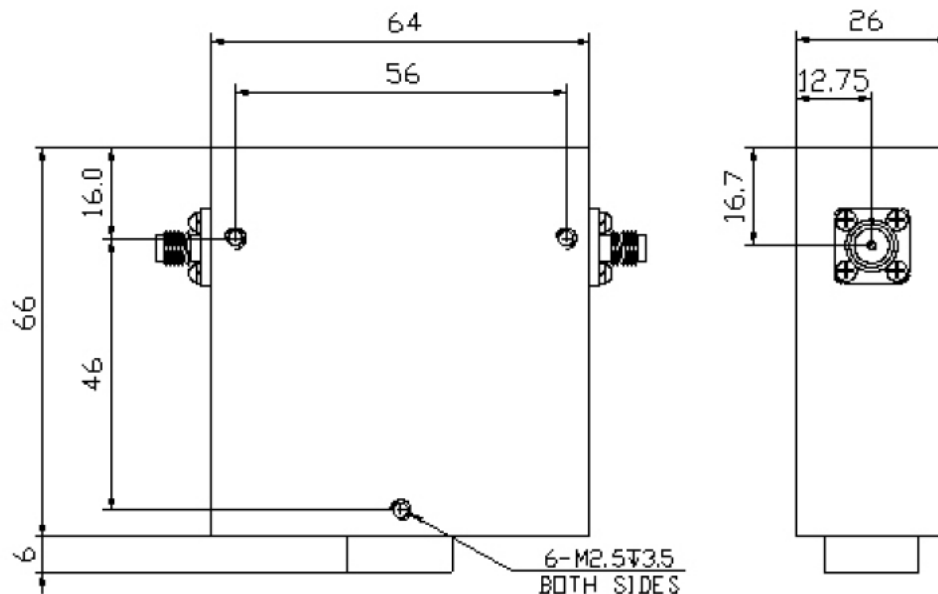

Dimensions in mm. All specifications are subject to change without notice.

Telephone: 978-772-3767

Fax: 978-772-3768

www.responsemicrowave.com