



94 JACKSON ROAD, SUITE 110, DEVENS, MA 01434

## Coaxial DC Block


Model RMDC.18000Nmf

50 $\Omega$  Type N

| Frequency Range (GHz)<br>FL-Fu | Insertion Loss<br>(dB max) | Voltage Rating<br>(V) | VSWR<br>(max) | Power   |
|--------------------------------|----------------------------|-----------------------|---------------|---------|
| 0.05-18GHz                     | 0.6                        | 50                    | $\leq 1.25:1$ | 100W CW |

**Notes:**

- Connector: N male/female
- Operation temperature: -55°C to +85°C
- Case material: SU303F Stainless/passivate  
Center Contact: BeCu/gold

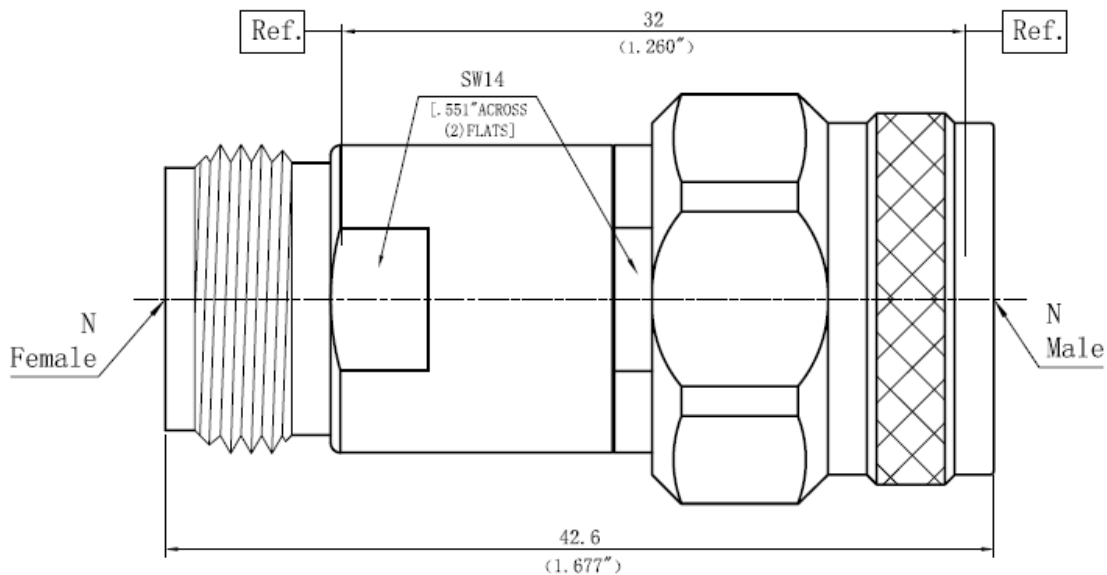

All specifications are subject to change without notice.

Dimensions: mm

Telephone: 978-772-3767

Fax: 978-772-3768

[www.responsemicrowave.com](http://www.responsemicrowave.com)

Rev 2/28/18