94 JACKSON ROAD, SUITE 110, DEVENS, MA 01434

Coaxial DC Block

Model RMDC.18000SMAmf SMA, male/female

Frequency Range (GHz)	Insertion Loss (dB max)	Voltage Rating (V DC)	VSWR (max)	Impedance (Ω)
0.3-18	0.8	50	≤ 1.25:1	50

Notes:

a. **Connector: SMA male/female**
b. **Inner block**
c. **Operation temperature: -55°C to +85°C**
d. **Case material: stainless steel/passivate**

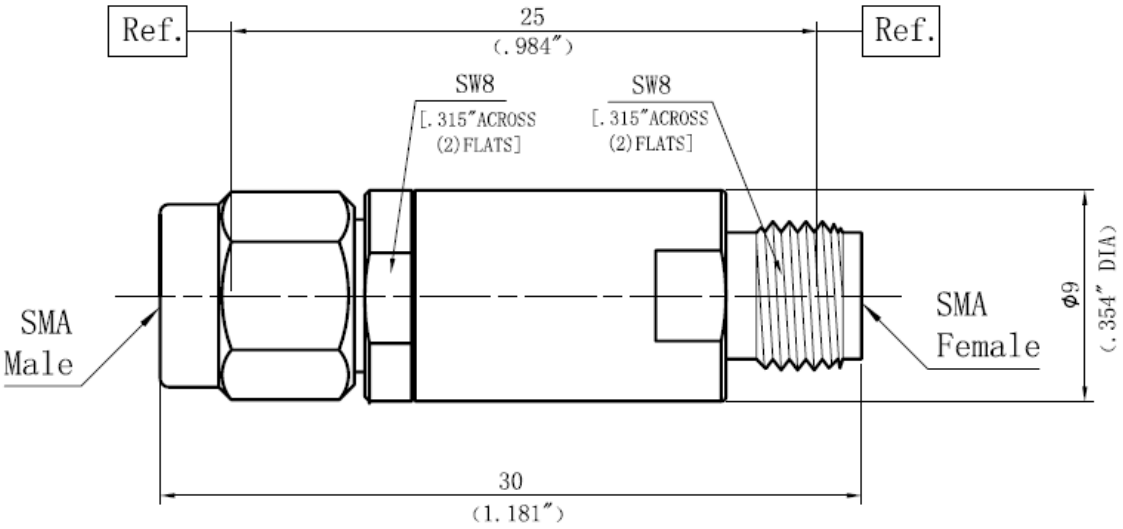



All specifications are subject to change without notice.

Telephone: 978-772-3767 **Fax: 978-772-3768**

www.responsemicrowave.com

Rev 2/28/18