



94 JACKSON ROAD, SUITE 110, DEVENS, MA 01434

Coaxial DC Block



Model RMDC.26500SMA27mf

SMA, male/female

Frequency Range (GHz)	Insertion Loss (dB max)	Voltage Rating (V DC)	VSWR (max)	Impedance (Ω)
0.05-26.5	0.8	50	$\leq 1.25:1$	50

Notes:

- Connector: SMA male/female
- Inner block
- Operation temperature: -55°C to +85°C
- Case material: stainless steel/passivate

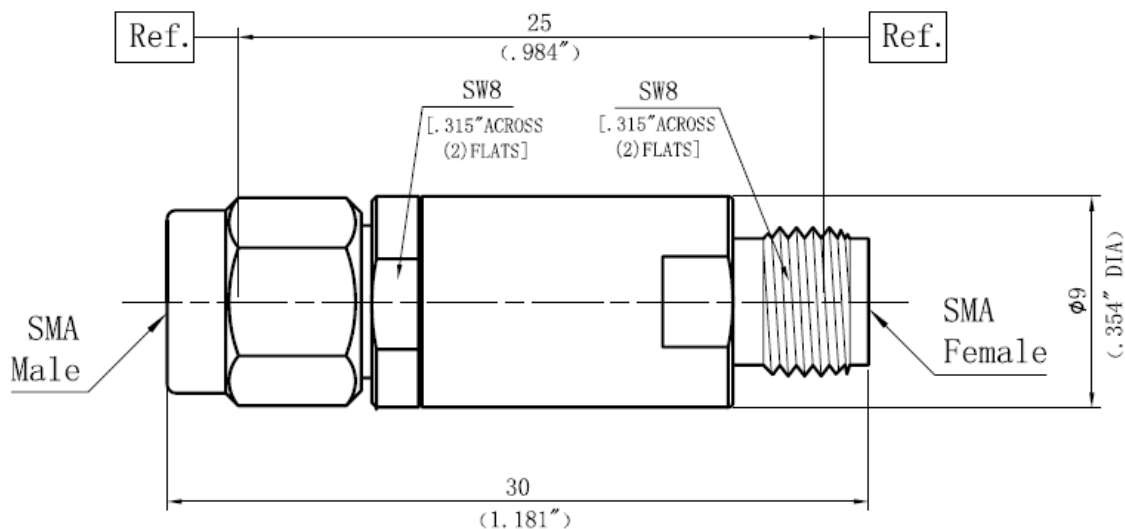

All specifications are subject to change without notice

Telephone: 978-772-3767

Fax: 978-772-3768

www.responsemicrowave.com

Rev 2/28/18