94 JACKSON ROAD, SUITE 110, DEVENS, MA 01434

Coaxial DC Block

Model RMDC.3000Nmf 50Ω Type N

Frequency Range (GHz) FL-Fu	Insertion Loss (dB max)	Voltage Rating (V)	VSWR (max)	Power
80-3000MHz	0.4	100	≤ 1.20:1	50W CW

Notes:

a. Connector: N male/female
b. Operation temperature: -55°C to +85°C
c. Case material: brass/nickel plate
d. Insulator material: PTFE
e. Voltage: 100v
f. Impedance: 50Ω

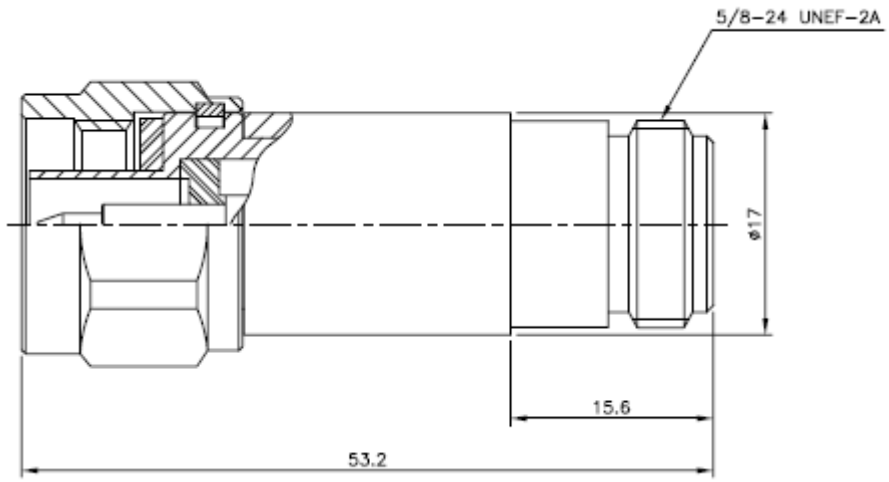

All specifications are subject to change without notice. Dimensions: mm

Telephone: 978-772-3767 **Fax: 978-772-3768**

www.responsemicrowave.com

Rev 8/27/05