



94 JACKSON ROAD, SUITE 110, DEVENS, MA 01434

Coaxial DC Block


Model RMDC.3000Nmf100

50Ω Type N

Frequency Range (GHz) FL-Fu	Insertion Loss (dB max)	Voltage Rating (V)	VSWR (max)	Power
80-3000MHz	0.2	100	$\leq 1.30:1$	100W CW

Notes:

- Connector: N male/female
- Operation temperature: -55°C to +85°C
- Case material: brass/nickel plate
- Insulator material: PTFE
- Contact material: BeCu/silver plate

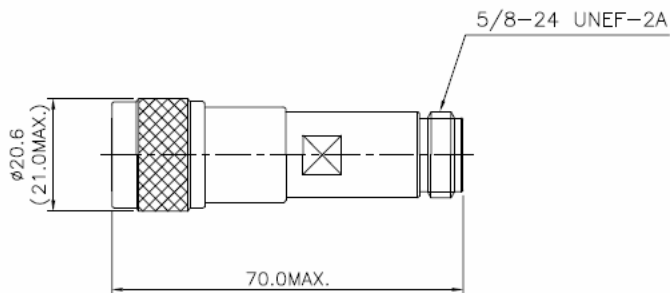

All specifications are subject to change without notice.

Dimensions: mm

Telephone: 978-772-3767

Fax: 978-772-3768

www.responsemicrowave.com

Rev 3/7/15