



94 JACKSON ROAD, SUITE 110, DEVENS, MA 01434

Coaxial DC Block


Model RMDC.40000.292mf

2.92mm

Frequency Range (GHz)	Insertion Loss (dB max)	Voltage Rating (V DC)	VSWR (max)	Impedance (Ω)
0.05-40	0.6	50	$\leq 1.25:1$	50

Notes:

- Connector: 2.92mm male/female
- Inner block
- Operation temperature: -55°C to +85°C
- Case material: stainless steel/passivate

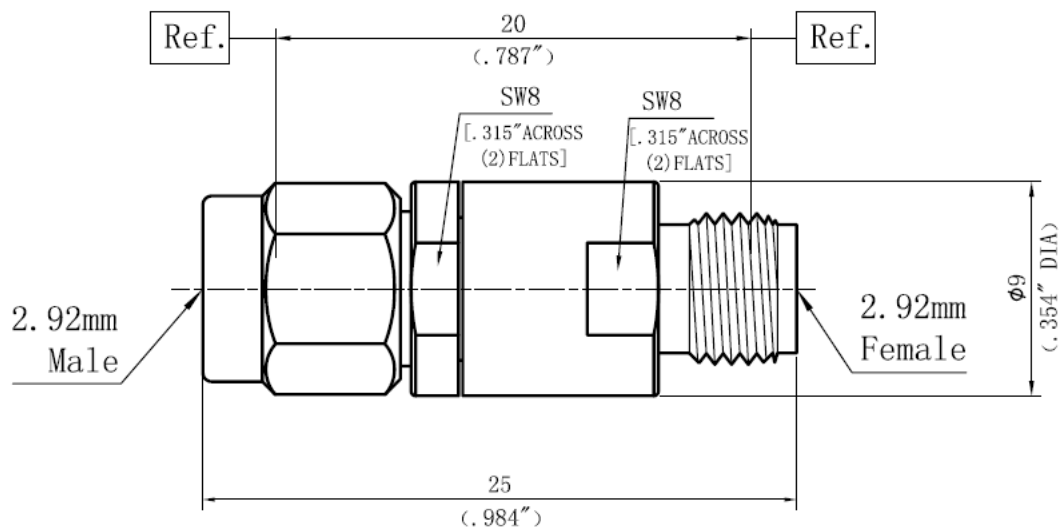

All specifications are subject to change without notice.

Dimensions: mm/inches

Telephone: 978-772-3767

Fax: 978-772-3768

www.responsemicrowave.com

Rev 8/27/05