



94 JACKSON ROAD, SUITE 110, DEVENS, MA 01434

Coaxial DC Block


Model RMDC.50000.24mf

2.4mm male/female

Frequency Range (GHz)	Insertion Loss (dB max)	Voltage Rating (V DC)	VSWR (max)	Impedance (Ω)
0.03-50	0.6	50	$\leq 1.25:1$	50

Notes:

- Connector: 2.4mm male/female, stainless steel/passivate
- Case material: stainless steel/passivate
- Inner block
- Operation temperature: -55°C to +85°C

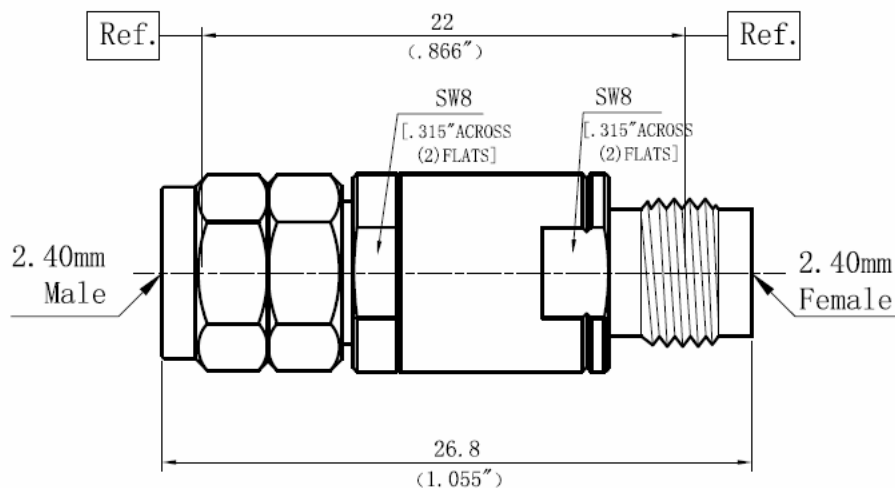

All specifications are subject to change without notice.

Dimensions: mm/inches

Telephone: 978-772-3767

Fax: 978-772-3768

www.responsemicrowave.com

Rev 10/3/09