



94 JACKSON ROAD, SUITE 110, DEVENS, MA 01434

Coaxial DC Block


Model RMDC.6000Nmf

N male/female

Frequency Range (GHz) FL-Fu	Insertion Loss (dB max)	Impedance	VSWR (max)	Power
10-6000MHz	0.4	50Ω	≤ 1.20:1	2W

Notes:

- Connector: N male/female
- Operation temperature: -55°C to +85°C
- Case material: brass/ternary
- Voltage: 50v

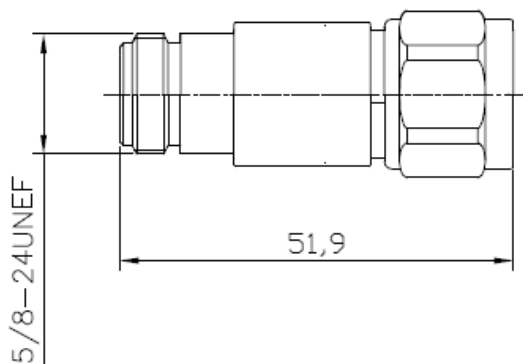

All specifications are subject to change without notice.

Dimensions: mm

Telephone: 978-772-3767

Fax: 978-772-3768

www.responsemicrowave.com

Rev 5/2/18