



94 JACKSON ROAD, SUITE 110, DEVENS, MA 01434 USA

Directional Coupler

Model RMCO10.1-26.5Sf


10dB Coupler – SMA female

Electrical Specifications:

Frequency	Coupling	Coupling Flatness	Insertion Loss	Directivity	VSWR	Power Handling
1-26.5GHz	10±0.5dB	0.8dB max	1.8dB max	13dB min	1.60:1 max	20 Watts CW

Notes:

- Input and output impedance: 50Ω
- Connector: SMA27 female
- Material: aluminum alloy w/black paint
- Operation temperature: -55 °C to +105°C

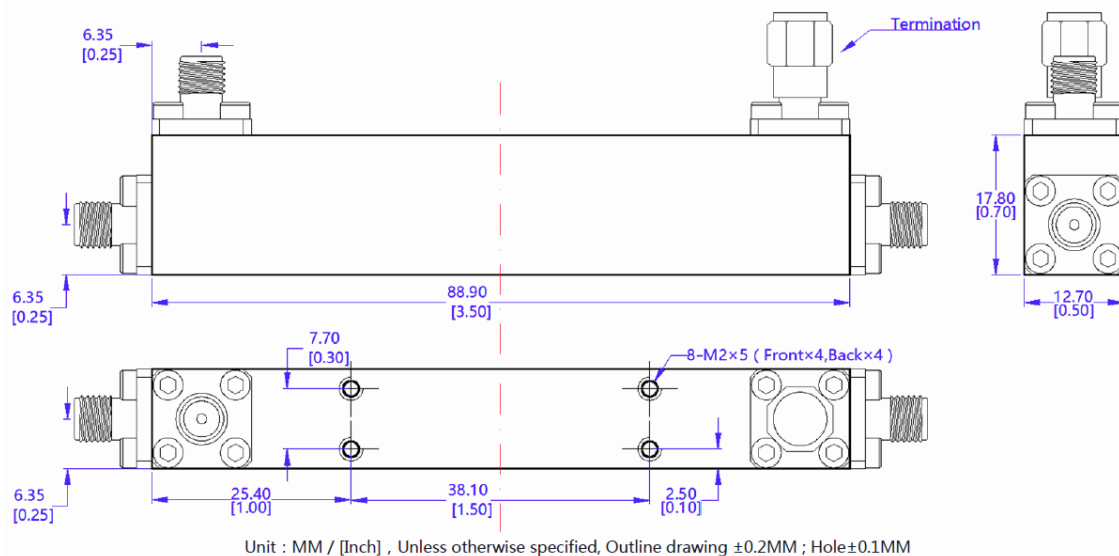

All specifications are subject to change without notice. **RoHS Compliant**

Telephone: 978-772-3767

Fax: 978-772-3768

www.responsemicrowave.com