



94 JACKSON ROAD, SUITE 110, DEVENS, MA 01434 USA

Directional Coupler


Model RMCO10.1000-4000Sf

10dB, SMA female

Frequency	Coupling	Unbalance	VSWR	Insertion Loss	Directivity
1- 4GHz	10dB+/-1	0.7dB	1.2:1	0.4dBmax*	20dBmin

Notes:

- Input and output impedance: 50 Ω
- Connector: SMA female 3 places, termination 1 place
- Power: Forward/Reverse $\leq$ 50 W
- Case material: Aluminum alloy with black paint
- *Insertion loss excludes coupling loss of 0.46dB
- Operation temperature: -40°C to +70°C

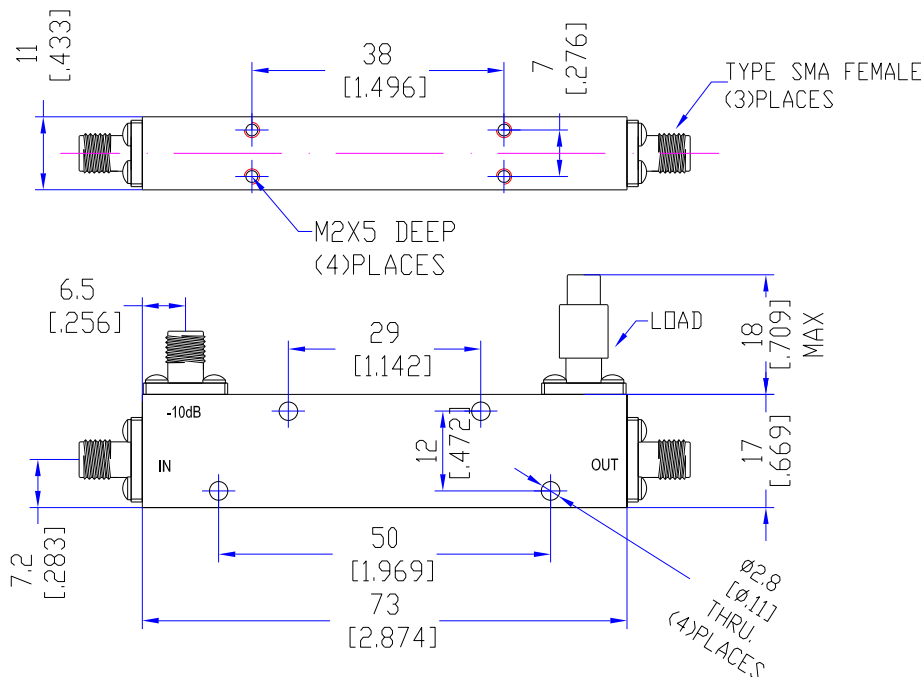

Dimensions in mm. All specifications are subject to change without notice.

Telephone: 978-772-3767

Fax: 978-772-3768

www.responsemicrowave.com