


xxdB Coupler – 2.92mm female

Frequency	Coupling	Insertion Loss	Directivity	VSWR	Power Handling
17 - 21GHz	xx±0.5dB	0.7dB max	16dB min	1.40:1max	25 Watts CW

- a. Input and output impedance: 50Ω
- b. Connector: 2.92 female SS/P
- c. Material: aluminum alloy w/black paint
- d. Operation temperature: -55 °C to +105°C
- e. Insert 6,10,20,30dB coupling value @ “xx”

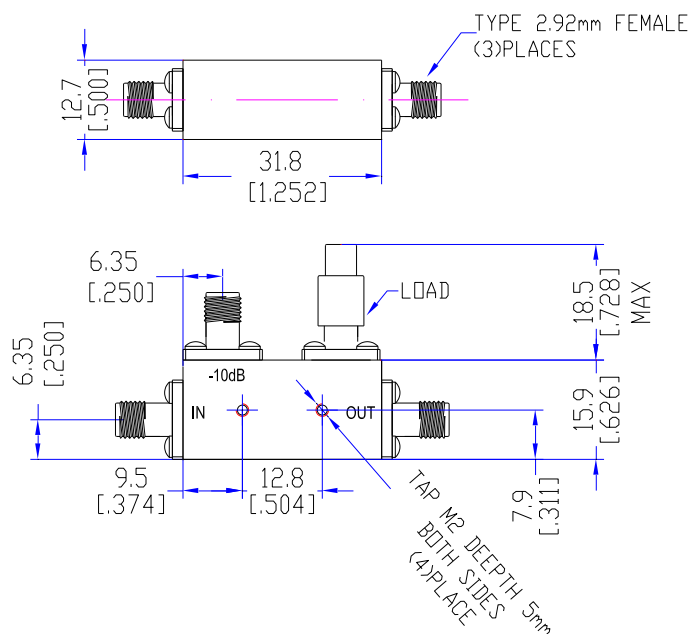

Dimensions in mm and tolerances +/-0.2mm All specifications are subject to change without notice.

Fax: 978-772-3768