



94 JACKSON ROAD, SUITE 110, DEVENS, MA 01434 USA

Directional Coupler

Model RMCO10.17-22.Sf


10dB SMA female

Electrical Specifications:

Frequency	Coupling	Insertion Loss	Directivity	VSWR	Unbalance
17 - 22GHz	10±0.7dB	1.2dB max	12dB min	1.50:1max	±0.5dB

Notes:

- Input and output impedance: 50Ω
- Connector: SMA female
- Material: aluminum alloy w/black paint
- Power: 25W incident, 10W reflected
- Operation temperature: -55 °C to +85°C

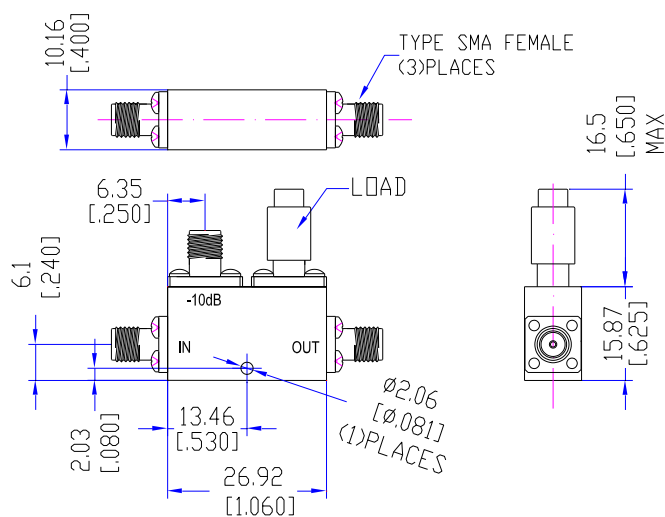

Dimensions in mm and tolerances +/-0.2mm All specifications are subject to change without notice.

Telephone: 978-772-3767

Fax: 978-772-3768

www.responsemicrowave.com

rev 4/21/23