



94 JACKSON ROAD, SUITE 110, DEVENS, MA 01434 USA

Directional Coupler


Model RMCO10.2000-4000Nf

10dB Directional Coupler N female

Frequency	Coupling	Unbalance	VSWR	Insertion Loss	Directivity
2- 4GHz	10dB+/-1	1.1dB	1.25:1	0.35dBmax	20dBmin

Notes:

- Input and output impedance: 50 Ohms
- Connector: N female 3 places, termination 1 place
- Power: Forward: 200 W Peak: 2KW
- Case material: Aluminum alloy with clear iridite
- Operation temperature: -40C to +70C deg

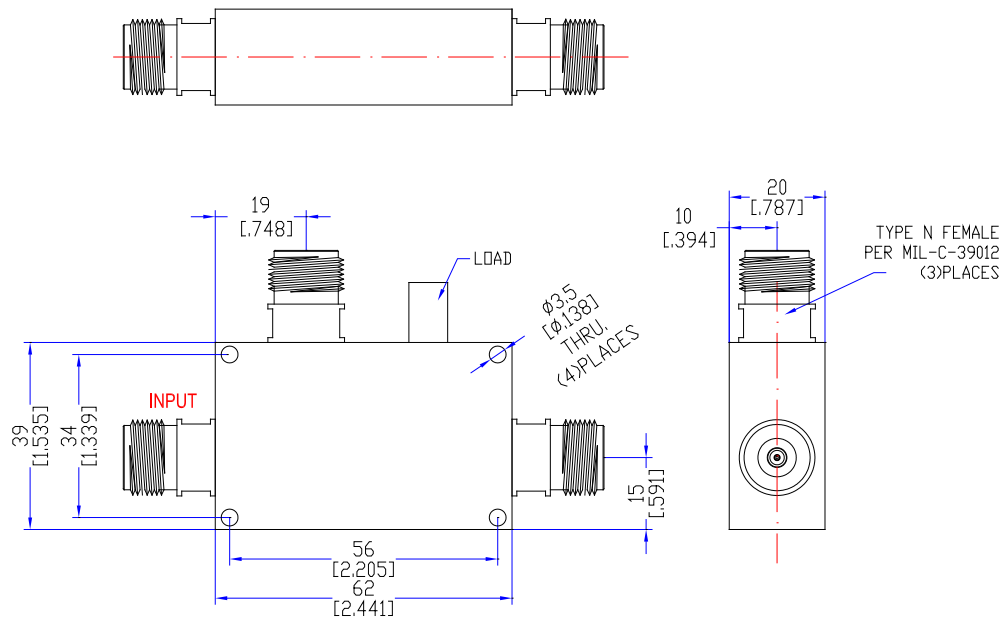

Dimensions in mm. All specifications are subject to change without notice.

Telephone: 978-772-3767

Fax: 978-772-3768

www.responsemicrowave.com