



94 JACKSON ROAD, SUITE 110, DEVENS, MA 01434 USA

Directional Coupler

Model RMCO10.2000-8000Sfa


10dB Directional Coupler SMA female

Frequency	Coupling	Unbalance	VSWR	Insertion Loss	Directivity
2- 8GHz	10dB+/-1	+/-0.5dBmax	1.25:1	0.35dBmax	20dBmin

Notes:

- Input and output impedance: 50Ω
- Connector: SMA female 3 places, termination 1 place
- Power: Forward/Reverse ≤ 50 W, peak ≤ 3K W
- Case material: Aluminum alloy with black paint
- Operation temperature: -55°C to +85°C
- Specify desired coupling value at "xx"

Complies with the requirement set out the Council Directive 2002/95/EC. The following standards were applies: EPA3050B&AAS, EPA3060A&EPA7196, EPA3052&AAS, EN1122: 2001&AAS, EPA3540C&GC-MS

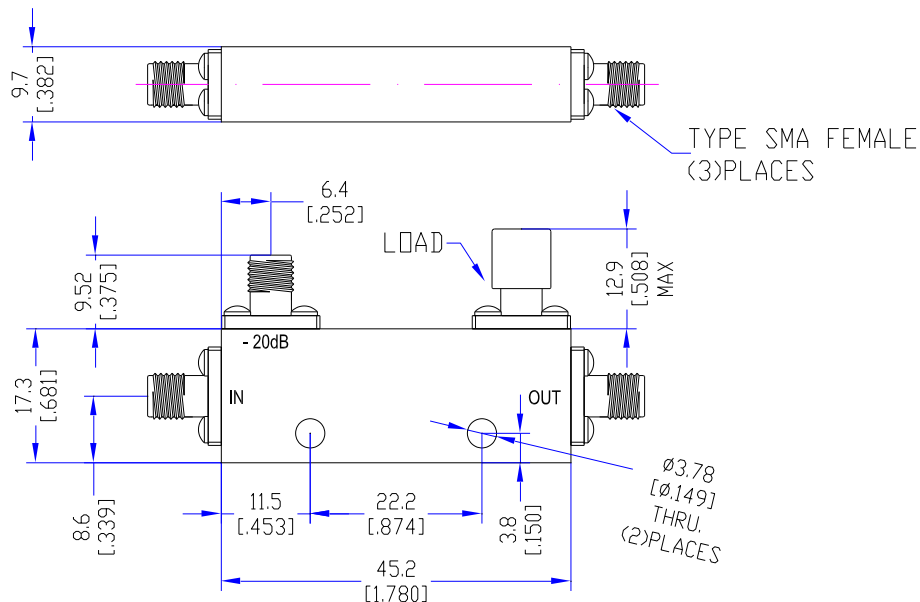

Dimensions in mm. All specifications are subject to change without notice.

Telephone: 978-772-3767

Fax: 978-772-3768

www.responsemicrowave.com