94 JACKSON ROAD, SUITE 110, DEVENS, MA 01434 USA

Directional Coupler

Model RMCO10.2200-2500.Smf 10dB SMA male/female

Electrical Specifications:

Frequency	Coupling	Insertion Loss	Directivity	VSWR	Unbalance
2.2 – 2.5GHz	10±0.5dB	0.4dB max	18dB min	1.30:1max	±0.5dB

Notes:

a. **Input and output impedance: 50Ω**
b. **Connector: SMA male input/female outputs**
c. **Material: aluminum alloy w/black paint**
d. **Power: 50W incident, 2W reflected**
e. **Operation temperature: -55 ºC to +85ºC**

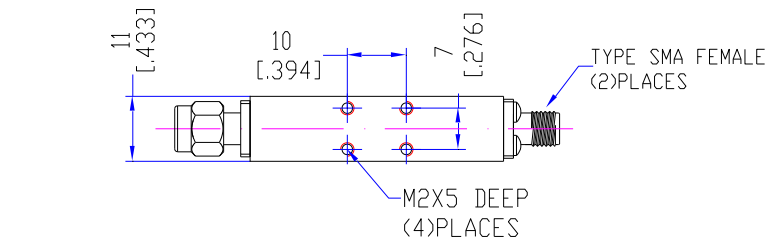

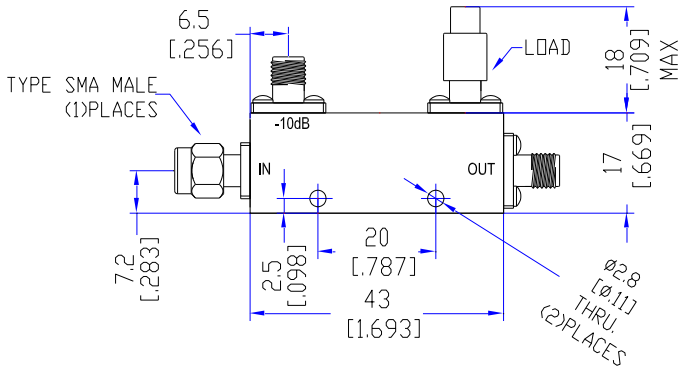

Dimensions in mm and tolerances +/-0.2mm All specifications are subject to change without notice.

Telephone: 978-772-3767 **Fax: 978-772-3768**

www.responsemicrowave.com