



94 JACKSON ROAD, SUITE 110, DEVENS, MA 01434 USA

Directional Coupler

Model RMCO10.26.5-40.292f


10dB Coupler – 2.92mm female

Electrical Specifications:

Frequency	Coupling	Coupling Flatness	Insertion Loss	Directivity	VSWR	Power Handling
26.5-40GHz	10 ± 1dB	0.5dB max	1.5dB max	12dB min	1.70:1 max	20 Watts CW

Notes:

- Input and output impedance: 50 Ohms
- Connector: 2.92 female
- Material: aluminum alloy
- Operation temperature: -55 °C to +105°C deg

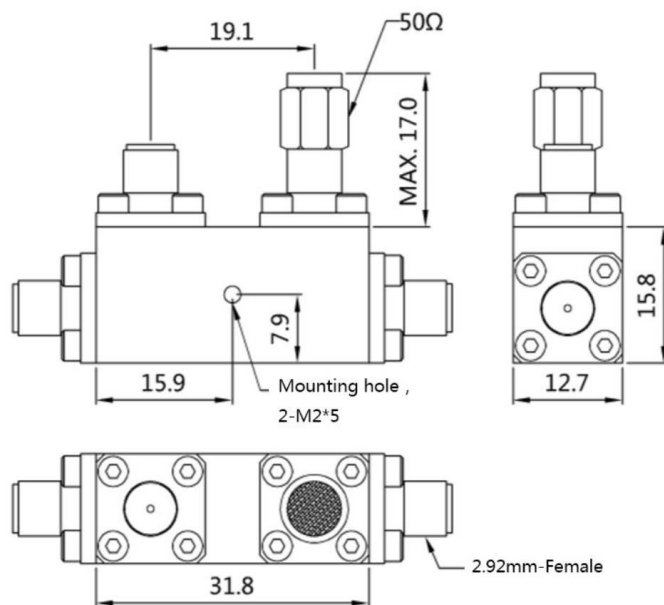

Dimensions in mm. All specifications are subject to change without notice. **RoHS Compliant**

Telephone: 978-772-3767

Fax: 978-772-3768

www.responsemicrowave.com