94 JACKSON ROAD, SUITE 110, DEVENS, MA 01434 USA

Directional Coupler

Model RMCO10.27-31.292f **10dB Coupler – 2.92mm female**

Electrical Specifications:

Frequency	Coupling	Flatness	Insertion Loss	Directivity	VSWR	Power Handling
27 - 31GHz	10±0.5dB	0.8dB max	1.4dB max	13dB min	1.50:1 max	20 Watts CW

Notes:

a. Input and output impedance: 50Ω
b. Connector: 2.92 female SS/P
c. Material: aluminum alloy w/black paint
d. Operation temperature: -55 ºC to +105ºC

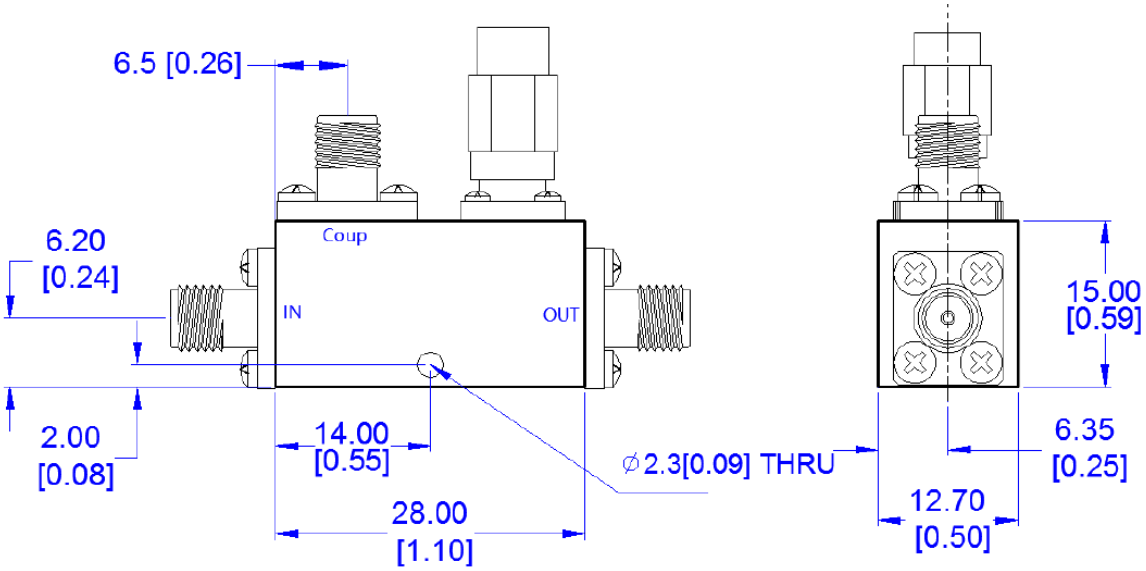

Dimensions in mm and tolerances +/-0.2mm All specifications are subject to change without notice.

Telephone: 978-772-3767 **Fax: 978-772-3768**

www.responsemicrowave.com