



94 JACKSON ROAD, SUITE 110, DEVENS, MA 01434 USA

Directional Coupler

Model RMCO10.30-150Nf


10dB, N female

Frequency	Coupling	Unbalance	VSWR	Insertion Loss	Directivity
30- 150MHz	10dB+/-0.5	0.5dB	1.3:1max	1.5dBmax	20dBmin

Notes:

- Input and output impedance: 50 Ω
- Connector: N female 3 places
- Power: Forward/Reverse ≤ 2 W
- Case material: Aluminum alloy with clear iridite
- Operation temperature: -40°C to +80°C

Complies with the requirement set out the Council Directive 2002/95/EC. The following standards were applies: EPA3050B&AAS, EPA3060A&EPA7196, EPA3052&AAS, EN1122: 2001&AAS, EPA3540C&GC-MS

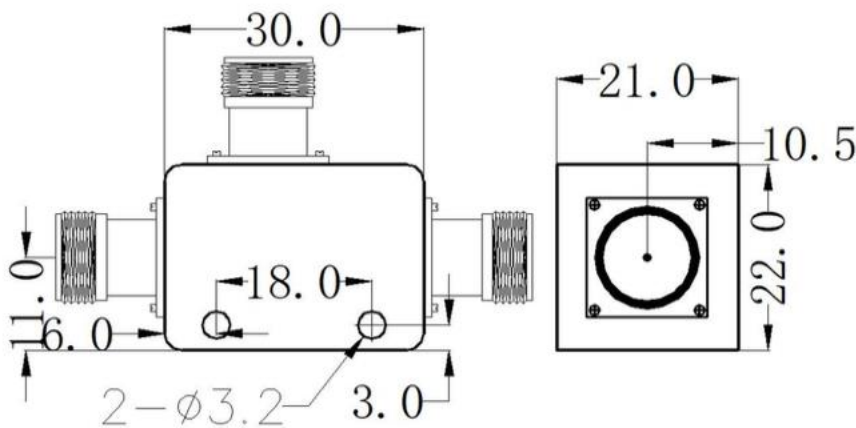

Dimensions in mm. All specifications are subject to change without notice.

Telephone: 978-772-3767

Fax: 978-772-3768

www.responsemicrowave.com