


Model RMCO10.300-1000Sf 10dB Directional Coupler SMA female

Frequency	Coupling	Unbalance	VSWR	Insertion Loss	Directivity
0.3- 1GHz	10dB+/-0.6	0.5dB	1.20:1	0.5dBmax	20dBmin

- Input and output impedance: 50 Ohms
- Connector: SMA female 3 places, removable termination 1 place
- Power: Forward/Reverse ≤ 50 W
- Case material: Aluminum alloy with black paint
- Operation temperature: -40C to +70C deg

Complies with the requirement set out in the Council Directive 2002/95/EC. The following standards were applied: EPA3050B&AAS, EPA3060A&EPA7196, EPA3052&AAS, EN1122: 2001&AAS, EPA3540C&GC-MS

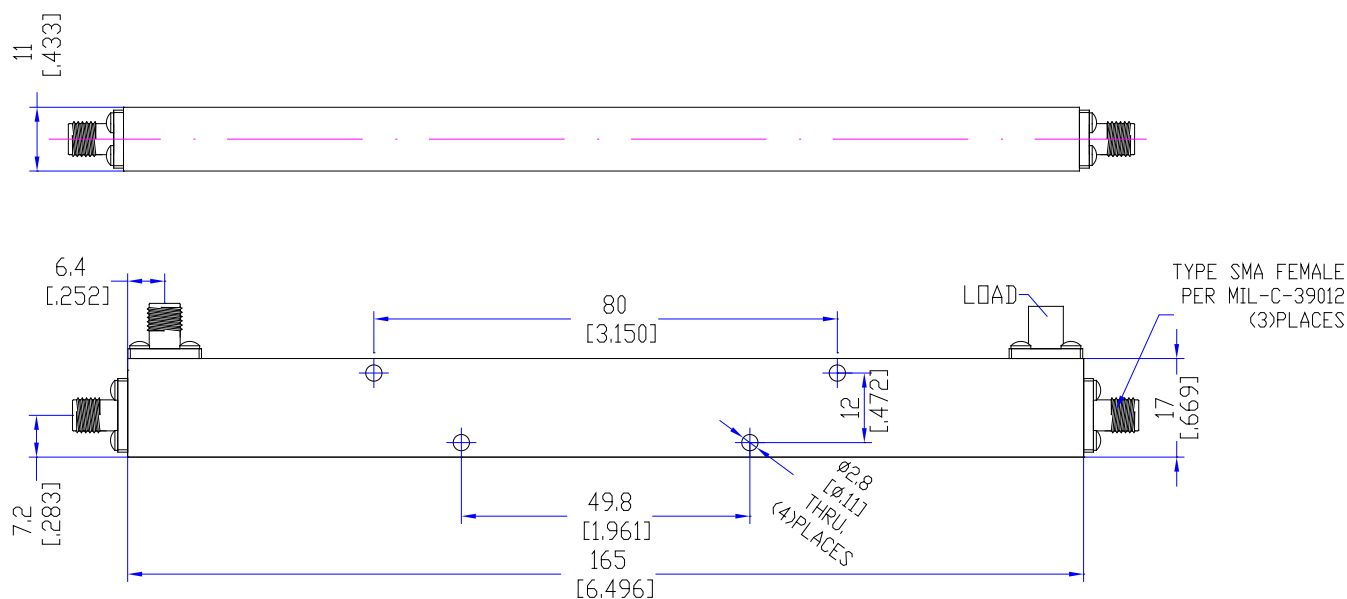

Dimensions in mm. All specifications are subject to change without notice.

Telephone: 978-772-3767

Fax: 978-772-3768

www.responsemicrowave.com