94 JACKSON ROAD, SUITE 110, DEVENS, MA 01434 USA

# Directional Coupler

## Model RMCO10.3400-4800Sf 10dB SMA female

## Electrical Specifications:

| Frequency | Coupling | Insertion Loss | Directivity | VSWR | Unbalance |
|---|---|---|---|---|---|
| 3.4 – 4.8GHz | 10±0.5dB | 0.5dB max | 18dB min | 1.30:1max | ±0.5dB |

**Notes:**

a. Input and output impedance: 50Ω
b. Connector: SMA female
c. Material: aluminum alloy w/black paint
d. Power: 50W incident, 2W reflected
e. Operation temperature: -55 ºC to +85ºC

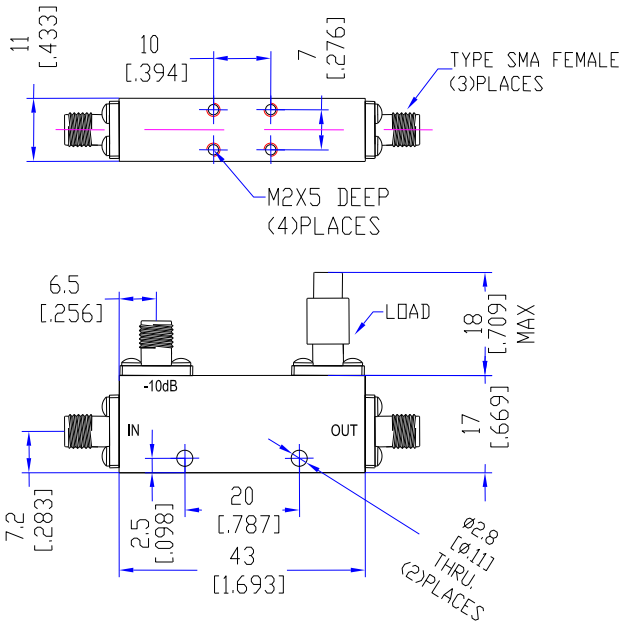


*Dimensions in mm and tolerances +/-0.2mm All specifications are subject to change without notice.*

**Telephone: 978-772-3767** **Fax: 978-772-3768**

www.responsemicrowave.com