



94 JACKSON ROAD, SUITE 110, DEVENS, MA 01434 USA

Directional Coupler

Model RMCO10.4-40.292f


10dB Coupler – 2.92mm female

Electrical Specifications:

Frequency	Coupling	Coupling Flatness	Insertion Loss	Directivity	VSWR	Power Handling
4-40GHz	10±0.7dB	0.8dB max	2.1dB max	10dB min	1.70:1 max	20 Watts CW

Notes:

- Input and output impedance: 50 Ohms
- Connector: 2.92 female
- Material: aluminum alloy
- Operation temperature: -55 °C to +105°C deg

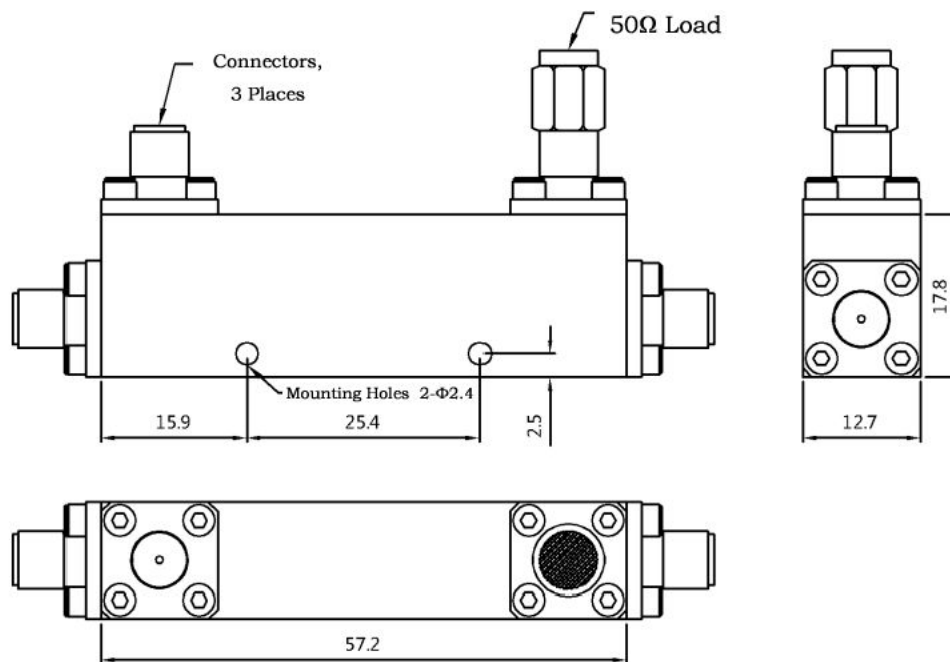

Note: Unit: mm, Unless otherwise specified, .Outline drawing +/-0.2mm; Hole +/-0.1mm

All specifications are subject to change without notice. **RoHS Compliant**

Telephone: 978-772-3767

Fax: 978-772-3768

www.responsemicrowave.com