94 JACKSON ROAD, SUITE 110, DEVENS, MA 01434 USA

Directional Coupler

Model RMCO10.4000-5000Sf 10dB, SMA female

Frequency	Coupling	Unbalance	VSWR	Insertion Loss	Directivity	Sensitivity
4 - 5GHz	10dB	+/-0.5dB	1.20:1	0.4dBmax	25dBmin	<=/-0.3dB

Notes:

a. **Input and output impedance: 50Ω**
b. **Connector: SMA female 3 places, termination 1 place**
c. **Power: Forward/Reverse ≤ 50 W, Peak 1Kw**
d. **Case material: Aluminum alloy with black paint**
e. **Operation temperature: -40°C to +70°C**

Complies with the requirement set out the Council Directive 2002/95/EC. The following standards were applies: EPA3050B&AAS, EPA3060A&EPA7196,EPA3052&AAS,EN1122: 2001&AAS, EPA3540C&GC-MS

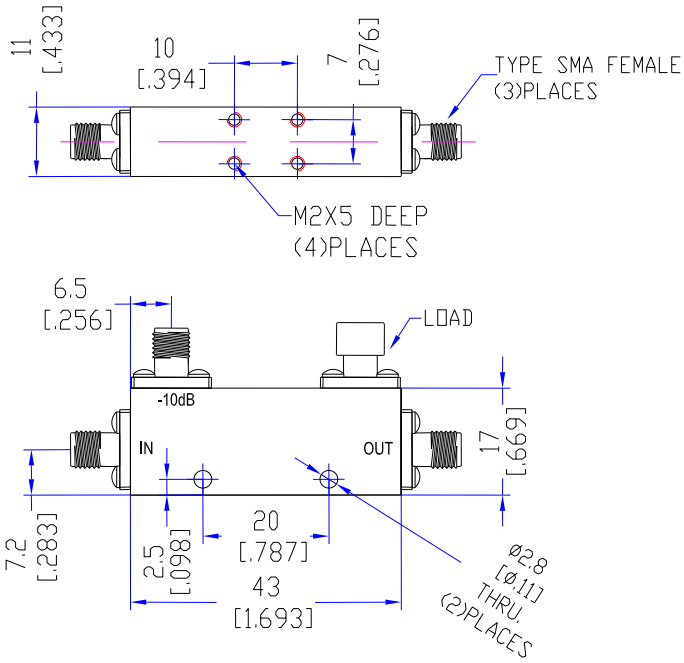

Dimensions in mm (inches). All specifications are subject to change without notice.

Telephone: 978-772-3767 **Fax: 978-772-3768**
www.responsemicrowave.com