



94 JACKSON ROAD, SUITE 110, DEVENS, MA 01434 USA

Directional Coupler


Model RMCO10.4000-8000Nf

10dB, N female

Frequency	Coupling	Unbalance	VSWR	Insertion Loss	Directivity	Sensitivity
4 - 8GHz	10dB	+/-1dB	1.40:1	0.4dBmax	18dBmin	<=/-0.8dB

Notes:

- Input and output impedance: 50 Ω
- Connector: N male out, N female in/coupled
- Power: Forward/Reverse $\leq$ 50 W, 1KW peak
- Case material: Aluminum alloy with black paint
- Operation temperature: -40°C to +85°C

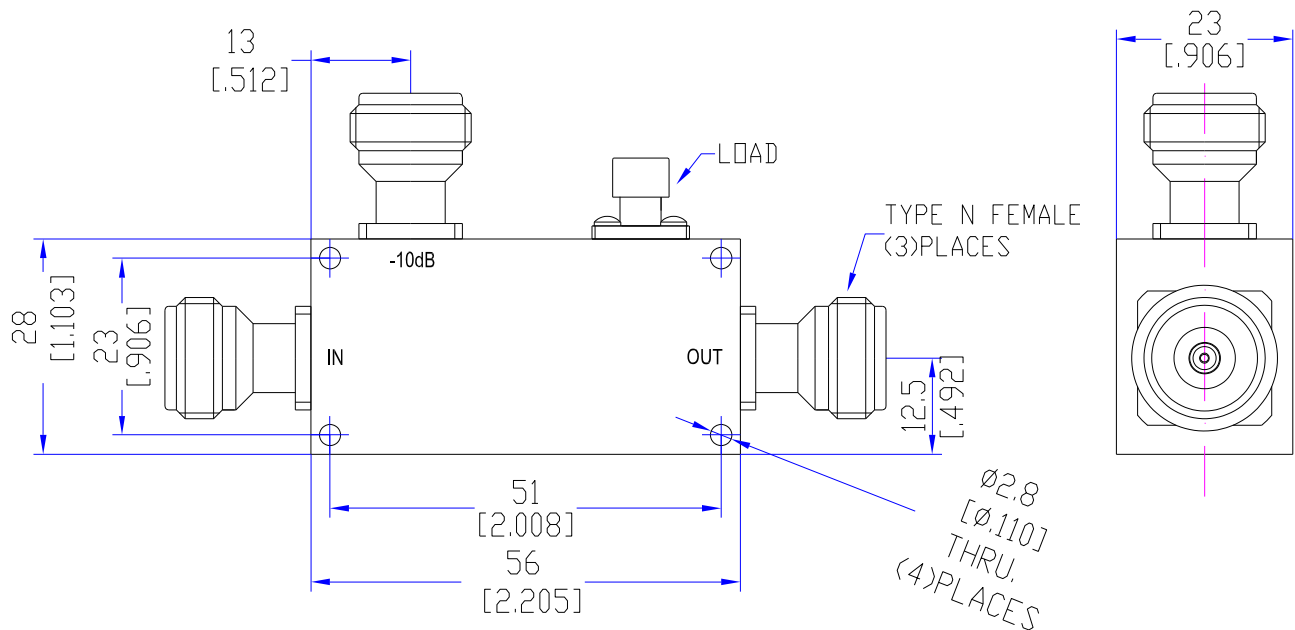

All specifications are subject to change without notice.

Telephone: 978-772-3767

Fax: 978-772-3768

www.responsemicrowave.com