



94 JACKSON ROAD, SUITE 110, DEVENS, MA 01434 USA

Directional Coupler

Model RMCO10.500-2000Sf


10dB Directional Coupler SMA female

Frequency	Coupling	Unbalance	VSWR	Insertion Loss	Directivity
500 – 2000MHz	10dB	+/- 0.7dB	1.15:1	0.35 dB max	22dB min

Notes:

- Input and output impedance: 50Ω
- Connector: SMA female 3 places, plus termination
- Power: Forward/Reverse ≤ 50 W avg/ 0.5KW peak
- Case material: Aluminum alloy with black paint
- Operation temperature: -30°C to $+85^{\circ}\text{C}$

Complies with the requirement set out the Council Directive 2002/95/EC. The following standards were applies: EPA3050B&AAS, EPA3060A&EPA7196, EPA3052&AAS, EN1122: 2001&AAS, EPA3540C&GC-MS

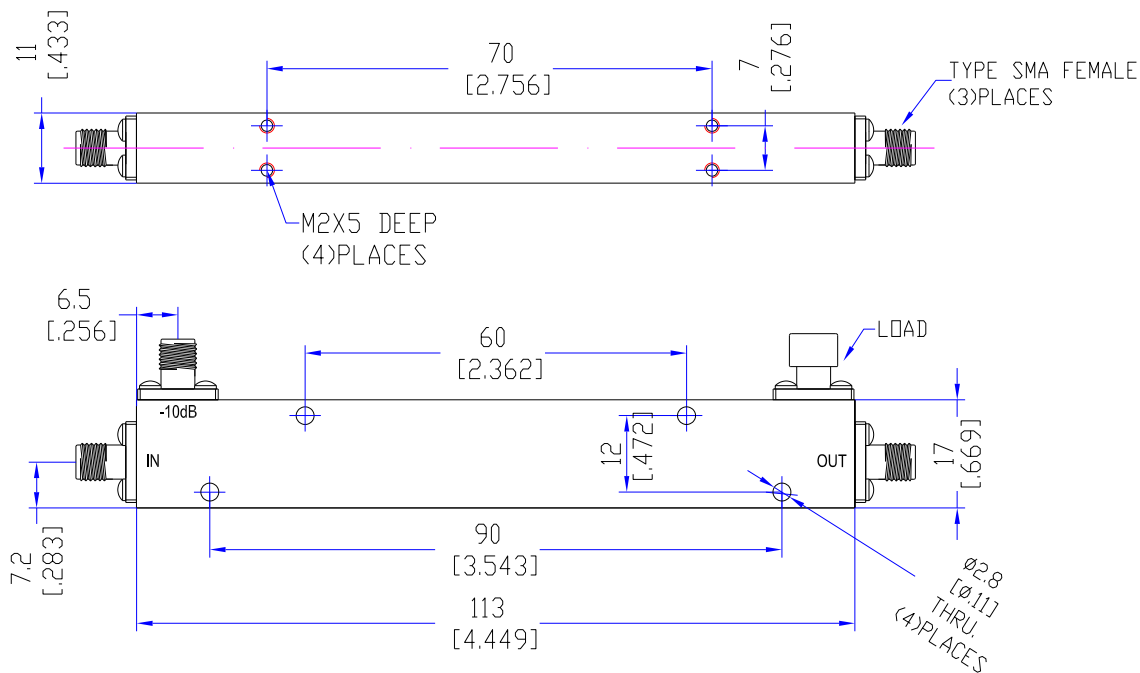

Dimensions in mm. All specifications are subject to change without notice.

Telephone: 978-772-3767

Fax: 978-772-3768

www.responsemicrowave.com