



94 JACKSON ROAD, SUITE 110, DEVENS, MA 01434 USA

Directional Coupler

Model RMCO10.500-40000.292f


10dB Coupler – 2.92mm

Electrical Specifications:

Frequency	Coupling	Flatness	Insertion Loss	Directivity	VSWR	Power Handling
0.5-40GHz	$10 \pm 1\text{dB}$	1.5dB max	3dB max	11dB min	1.70:1	20 Watts

Notes:

- Input and output impedance: 50Ω
- Connector: 2.92mm female per MIL-STD-348
- Material: aluminum w/black paint
- Operation temperature: -55°C to $+105^\circ\text{C}$

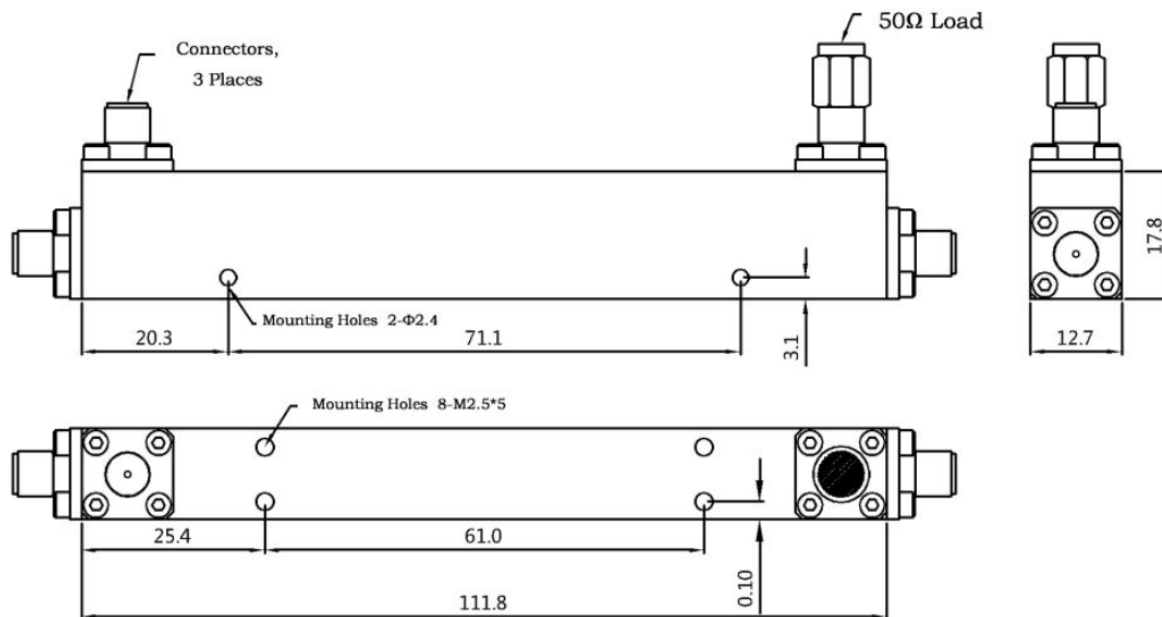

Dimensions in mm. All specifications are subject to change without notice. **RoHS Compliant**

Telephone: 978-772-3767

Fax: 978-772-3768