



94 JACKSON ROAD, SUITE 110, DEVENS, MA 01434 USA

Directional Coupler

Model RMCO10.500-6000Sf


10dB, SMA female

Frequency	Coupling	Unbalance	VSWR	Insertion Loss	Directivity
500 – 6000MHz	10dB +/-1	+/- 1dB	1.30:1	0.6 dB max	18dB min

Notes:

- Input and output impedance: 50 Ω
- Connector: SMA female 3 places, termination internal
- Power: Forward/Reverse $\leq$ 50 W avg/ 0.5KW peak
- Case material: Aluminum alloy with black paint
- Operation temperature: -30°C to +85°C

Complies with the requirement set out the Council Directive 2002/95/EC. The following standards were applies:
 EPA3050B&AAS, EPA3060A&EPA7196, EPA3052&AAS, EN1122: 2001&AAS, EPA3540C&GC-MS

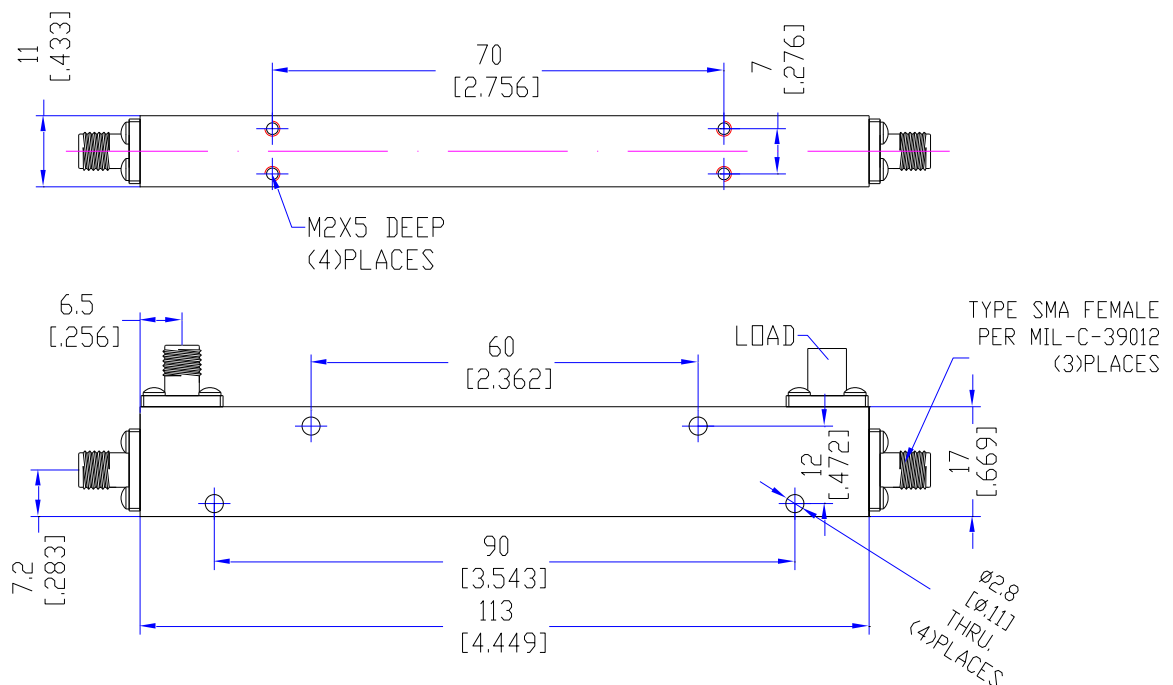

Dimensions in mm. All specifications are subject to change without notice.

Telephone: 978-772-3767

Fax: 978-772-3768

www.responsemicrowave.com