



94 JACKSON ROAD, SUITE 110, DEVENS, MA 01434 USA

Directional Coupler

Model RMCO10.6-26.5f


10dB Coupler – SMA female

Electrical Specifications:

Frequency	Coupling	Coupling Flatness	Insertion Loss	Directivity	VSWR	Power Handling
6-26.5GHz	10±0.5dB	0.6dB max	1.3dB max	13dB min	1.40:1 max	20 Watts CW

Notes:

- Input and output impedance: 50Ω
- Connector: 2.92mm female
- Material: aluminum alloy w/black paint
- Operation temperature: -55 °C to +105°C

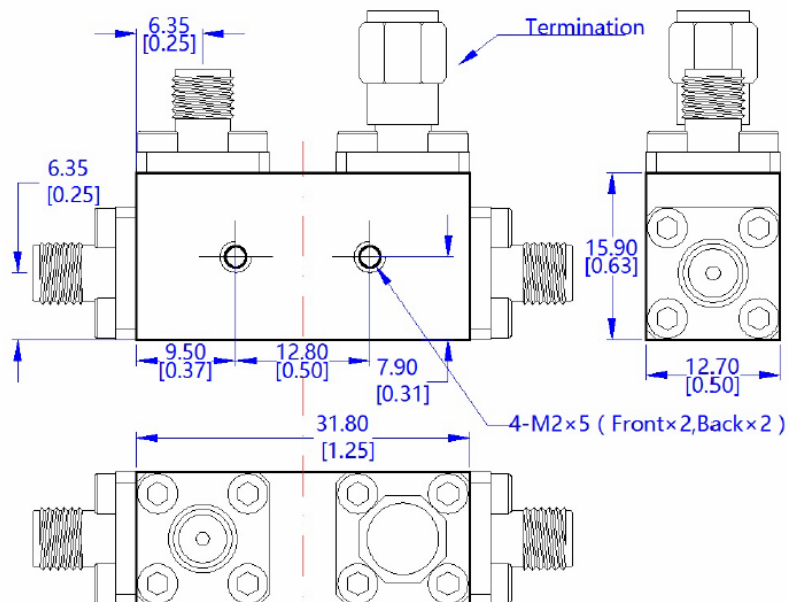

Unit : MM / [Inch] , Unless otherwise specified, Outline drawing ±0.2MM ; Hole±0.1MM

All specifications are subject to change without notice. **RoHS Compliant**

Telephone: 978-772-3767

Fax: 978-772-3768

www.responsemicrowave.com