94 JACKSON ROAD, SUITE 110, DEVENS, MA 01434 USA

Directional Coupler

Model RMCO10.7250-7750Sf 10dB SMA female

Electrical Specifications:

Frequency	Coupling	Insertion Loss	Directivity	VSWR	Unbalance
7.25 – 7.75GHz	10±0.5dB	0.6dB max	15dB min	1.30:1max	±0.5dB

Notes:

a. Input and output impedance: 50Ω
b. Connector: SMA female outputs
c. Material: aluminum alloy w/black paint
d. Power: 50W incident, 2W reflected
e. Operation temperature: -55 ºC to +85ºC

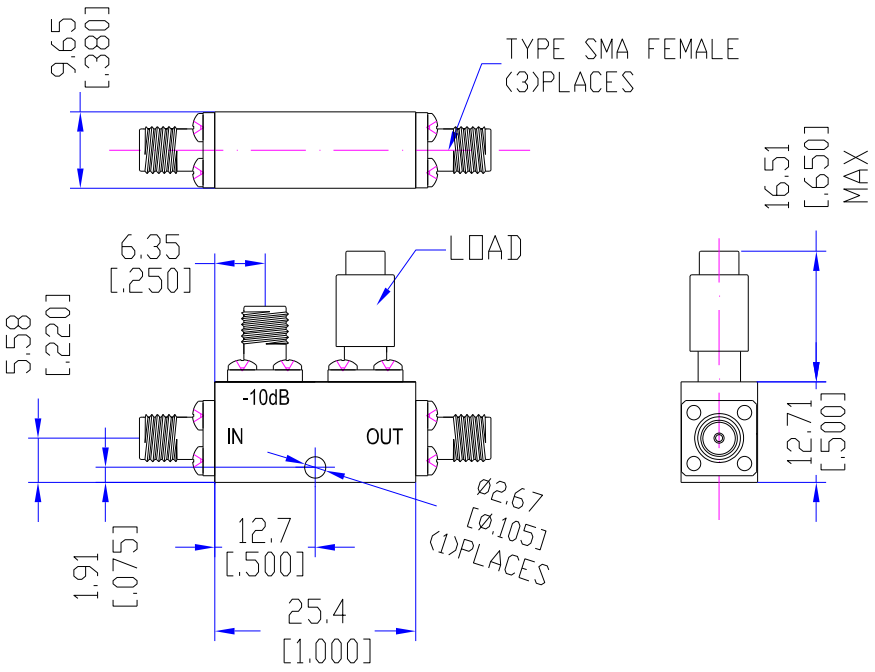

Dimensions in mm and tolerances +/-0.2mm All specifications are subject to change without notice.

Telephone: 978-772-3767 **Fax: 978-772-3768**

www.responsemicrowave.com