94 JACKSON ROAD, SUITE 110, DEVENS, MA 01434 USA

Directional Coupler

Model RMCO10.7500-16000Sf 10dB Coupler - SMA female

Electrical Specifications:

Frequency	Coupling	Coupling Flatness	Insertion Loss	Directivity	VSWR	Power Handling
7.5-16GHz	10 ± 0.8dB	0.6dB max	0.7dB max	12dB min	1.50:1	50 Watts CW

Notes:

a. Input and output impedance: 50 Ohms
b. Connector: SMA female
c. Material: aluminum w/black paint
d. Operation temperature: -35 ºC to +85ºC deg

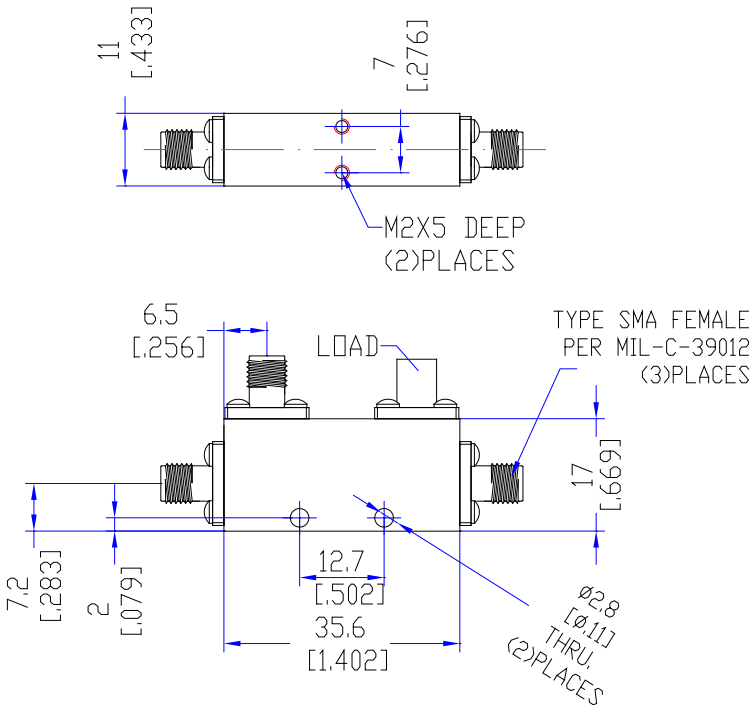

Dimensions in mm. All specifications are subject to change without notice. ***RoHS Compliant***

Telephone: 978-772-3767 **Fax: 978-772-3768**

www.responsemicrowave.com