94 JACKSON ROAD, SUITE 110, DEVENS, MA 01434 USA

Directional Coupler

Model RMCO10.800-2500Sf **10dB, SMA female**

Electrical Specifications:

Frequency	Coupling	Coupling Flatness	Insertion Loss	Directivity	VSWR	Power Handling
0.8-2.5GHz	10 ± 0.5dB	0.5dB max	0.3dB max	22dB min	1.15:1	50 Watts CW

Notes:

a. **Input and output impedance: 50 Ω**
b. **Connector: Passivated stainless SMA female 3 places**
c. **Material: aluminum w/black paint**
d. **Operation temperature: -35 ºC to +85ºC**
e. **Insert coupling value at "xx"**

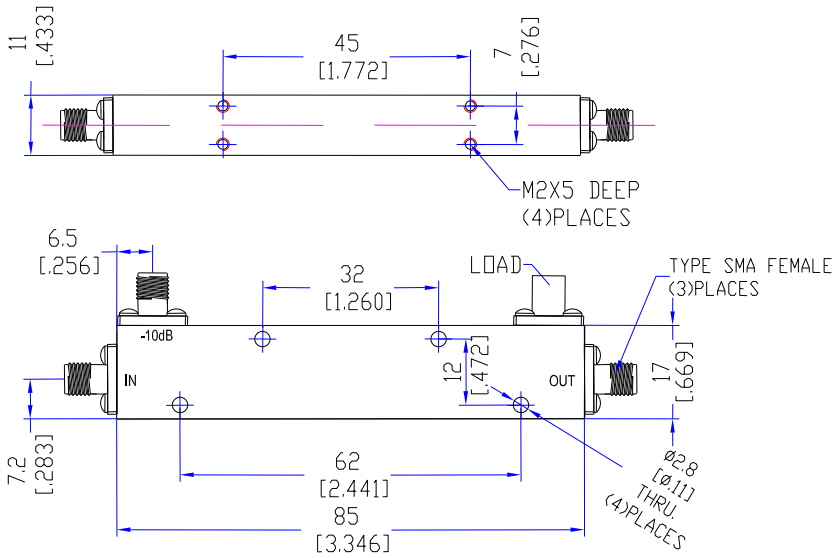

Dimensions in mm. All specifications are subject to change without notice. ***RoHS Compliant***

Telephone: 978-772-3767 **Fax: 978-772-3768**

www.responsemicrowave.com