94 JACKSON ROAD, SUITE 110, DEVENS, MA 01434 USA

Directional Coupler

Model RMCO20.1-67.185f 20dB Coupler – 1.85mm female

Electrical Specifications:

Frequency	Coupling	Flatness	Insertion Loss	Directivity	VSWR	Power Handling
1-67GHz	20±3.5dB	3dB max	2.8dB max	10dB min	1.90:1 max	20 Watts CW

Notes:

a. **Input and output impedance: 50Ω**
b. **Connector: 1.85mm female 3places**
c. **Material: aluminum alloy w/black paint**
d. **Operation temperature: -40 ºC to +85ºC**

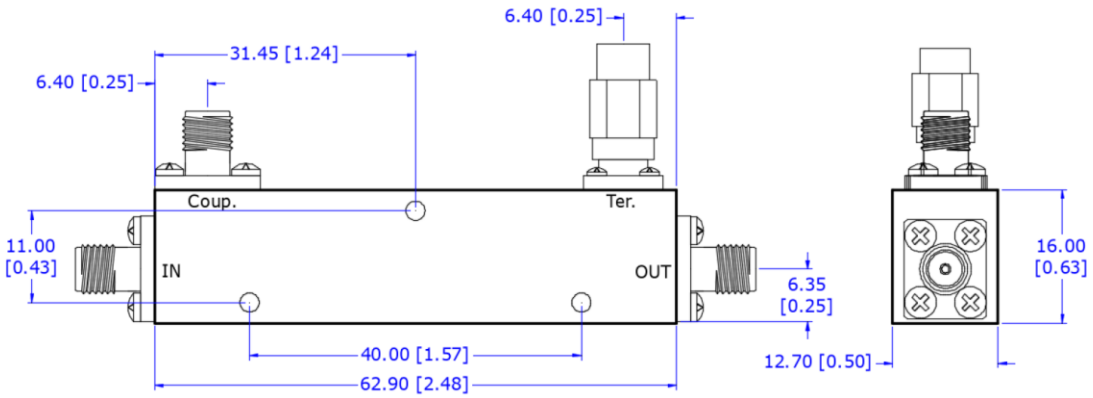

All specifications are subject to change without notice. ***RoHS Compliant***

Telephone: 978-772-3767 **Fax: 978-772-3768**

www.responsemicrowave.com