94 JACKSON ROAD, SUITE 110, DEVENS, MA 01434 USA

Dual Directional Coupler

Model RMCO20.10.7-13SfD 20dB, SMA female

Frequency	Coupling	Unbalance	VSWR	Insertion Loss	Directivity
10.7 - 13GHz	20dB+/-0.7	+/-0.7dB	1.45:1	1.8dBmax	11dBmin

Notes:

a. **Input and output impedance: 50Ω**
b. **Connector: SMA female 4 places, termination 2 places**
c. **Power: Forward/Reverse ≤ 50 W, Peak 3Kw**
d. **Case material: Aluminum alloy with black paint**
e. **Operation temperature: -40°C to +70°C**

Complies with the requirement set out the Council Directive 2002/95/EC. The following standards were applies: ***EPA3050B&AAS, EPA3060A&EPA7196,EPA3052&AAS,EN1122: 2001&AAS, EPA3540C&GC-MS***

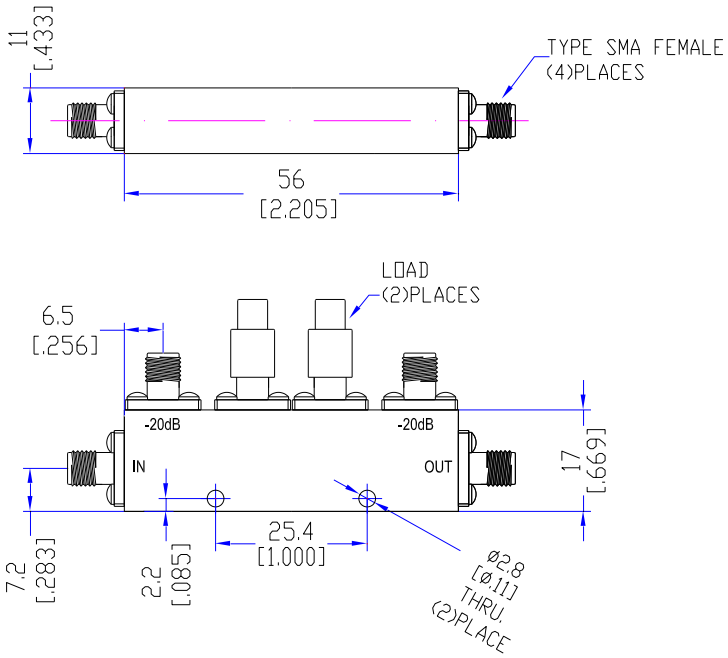

All specifications are subject to change without notice.

Telephone: 978-772-3767 **Fax: 978-772-3768**
www.responsemicrowave.com