



94 JACKSON ROAD, SUITE 110, DEVENS, MA 01434 USA

Directional Coupler

Model RMCO20.100-2000Sf


20dB, SMA female

Frequency	Coupling	Sensitivity	VSWR	Insertion Loss	Directivity
100 – 2000MHz	20dB+/-1	+/- 1.5dB	1.30:1	0.8dB max	18dB min

Notes:

- Input and output impedance: 50Ω
- Connector: SMA female 3 places, termination 1 places
- Power: Forward/Reverse 50W/2W
- Case material: Aluminum alloy with black paint
- Operation temperature: -30°C to +85°C

*Complies with the requirement set out the Council Directive 2002/95/EC. The following standards were applies:
EPA3050B&AAS, EPA3060A&EPA7196, EPA3052&AAS, EN1122: 2001&AAS, EPA3540C&GC-MS*

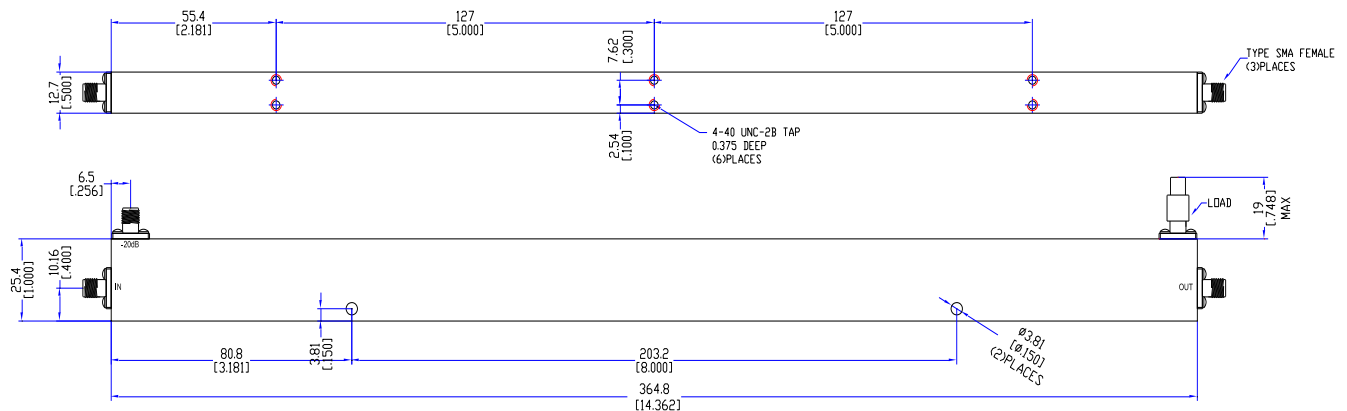

Dimensions in mm. All specifications are subject to change without notice.

Telephone: 978-772-3767

Fax: 978-772-3768

www.responsemicrowave.com