94 JACKSON ROAD, SUITE 110, DEVENS, MA 01434 USA

Dual-Directional Coupler

Model RMCO20.1000-6000SfD 20dB, SMA female

Frequency	Coupling	Unbalance	VSWR	Insertion Loss	Directivity
1- 6GHz	20dB+/-1	1.0dB	1.30:1	0.6dBmax	15dBmin

Notes:

a. **Input and output impedance: 50 Ω**
b. **Connector: SMA female 4 places**
c. **Power: Forward/Reverse ≤ 50 W/ 1KW peak**
d. **Case material: Aluminum alloy with black paint**
e. **Operation temperature: -40°C to +70°C**

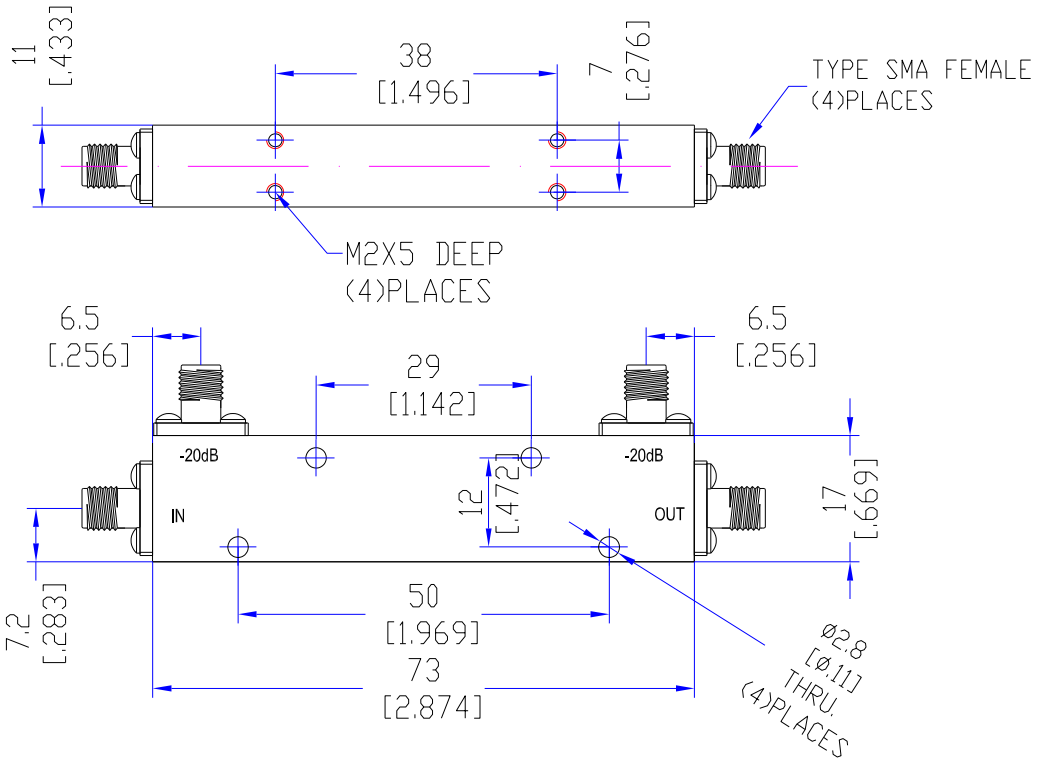

Dimensions in mm. All specifications are subject to change without notice.

Telephone: 978-772-3767 **Fax: 978-772-3768**
www.responsemicrowave.com