94 JACKSON ROAD, SUITE 110, DEVENS, MA 01434 USA

Directional Coupler

Model RMCO20.18-40.292f **20dB Coupler – 2.92mm female**

Electrical Specifications:

Frequency	Coupling	Coupling Flatness	Insertion Loss	Directivity	VSWR	Power Handling
18-40GHz	20 ± 1dB	1.2dB max	1.6dB max	10dB min	1.60:1max	20 Watts CW

Notes:

a. **Input and output impedance: 50 Ω**
b. **Connector: 2.92 female 3 places**
c. **Material: aluminum alloy**
d. **Operation temperature: -55 ºC to +105ºC**

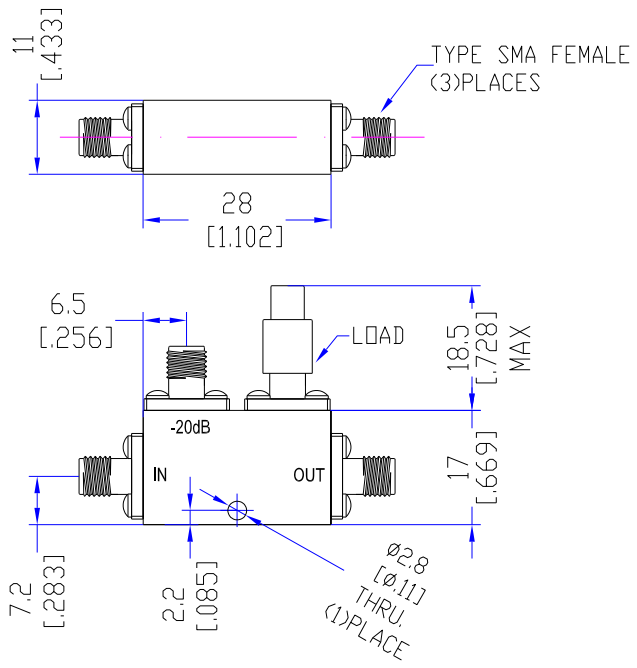

Dimensions in mm. All specifications are subject to change without notice. ***RoHS Compliant***

Telephone: 978-772-3767 **Fax: 978-772-3768**

www.responsemicrowave.com